

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



**MONTHLY EM&A REPORT**

**September 2016**

**Client** : Civil Engineering and Development  
Department, HKSAR

**Contract No.** : KLN/2015/07

**Contract Name** : Environmental Monitoring Works for  
Contract KL/2014/03 – Kai Tak Development  
– Stage 3 Infrastructure Works for Developments  
at the Southern Part of the Former Runway

**Report No.** : 0405/15/ED/0596A

EP-337/2009 New Distributor Roads Serving the Planned Kai Tak  
Development Area

EP-339/2009/A Decommissioning of the Remaining Parts (Ex-GFS  
Building, Radar Station and Hong Kong Aviation Club)  
of the former Kai Tak Airport

EP-451/2013 Trunk Road T2

**Prepared by** : Alfred Y. S. Lam

**Reviewed by** : Cyrus C. Y. Lai

**Certified by** :   
Colin K. L. Yung  
Environmental Team Leader  
MaterialLab Consultants Limited

Ref.: CEDKTDS3EM00\_0\_0117L.16

14 October 2016

Hyder-Meinhardt Joint Venture  
20/F., AXA Tower,  
Landmark East,  
100 How Ming Street,  
Kwun Tong,  
Kowloon, Hong Kong

By Post and Email

Attention: Mr. Wong W K, Chris

Dear Mr. Wong,

**Re: Contract No. KL/2014/03 – Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway  
Monthly EM&A Report for September 2016**

Reference is made to the Environmental Team's submission of the Monthly EM&A Report for September 2016 (Report No. 0405/15/ED/0596A) we received by e-mail on 12 October 2016.

Please be informed that we have no adverse comment on the captioned report. We hereby verify the captioned submission according to Condition 3.3 of EP-337/2009, Condition 3.3 of EP-339/2009/A and Condition 3.4 of EP-451/2013.

Thank you for your attention. Please do not hesitate to contact us should you have any queries.

Yours sincerely,  
For and on behalf of  
Ramboll Environ Hong Kong Limited



F. C. Tsang  
Independent Environmental Checker

c.c.	CEDD	Attn.: Ms. Amy Chu	Fax: 2369 4980
	MateriaLab	Attn.: Mr. Colin K. L. Yung	Fax: 2450 8032
	CRBC	Attn.: Mr. Arnold Chan	Fax: 2283 1689

Q:\Projects\CEDKTDS3EM00\02\_Proj\_Mgt\02\_Corr\CEDKTDS3EM00\_0\_0117L.16.docx

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

# **MaterialLab**

## TABLE OF CONTENTS

<b>EXECUTIVE SUMMARY</b>	<b>I</b>
<b>1. INTRODUCTION</b>	<b>1</b>
<b>2. AIR QUALITY</b>	<b>5</b>
<b>3. NOISE</b>	<b>10</b>
<b>4. LANDSCAPE AND VISUAL</b>	<b>14</b>
<b>5. WASTE MANAGEMENT</b>	<b>15</b>
<b>6. SITE INSPECTION</b>	<b>16</b>
<b>7. ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE</b>	<b>17</b>
<b>8. IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES</b>	<b>18</b>
<b>9. FUTURE KEY ISSUES</b>	<b>19</b>
<b>10. CONCLUSIONS</b>	<b>20</b>

## FIGURES

Figure 1	Project General Layout
Figure 2	Air and Noise Monitoring Locations

## LIST OF APPENDICES

Appendix A	Construction Programme
Appendix B	Project Organization Chart
Appendix C	Action and Limit Levels for Air Quality and Noise
Appendix D	Calibration Certificates of Monitoring Equipment
Appendix E	Environmental Monitoring Schedules
Appendix F	Air Quality Monitoring Data
Appendix G	Noise Monitoring Data
Appendix H	Event Action Plans
Appendix I	Waste Flow Table
Appendix J	Environmental Mitigation Implementation Schedule (EMIS)
Appendix K	Weather and Meteorological Conditions during Reporting Month
Appendix L	Cumulative statistics on Environmental Complaints, Notifications of Summons and Successful Prosecutions
Appendix M	Summary of Site Audit in the Reporting Month
Appendix N	Outstanding Issues and Deficiencies

## **EXECUTIVE SUMMARY**

- i. The Civil Engineering and Development Department HKSAR has appointed MaterialLab Consultants Limited (MCL) to undertake the Environmental Team services for the Project and implement the EM&A works.
- ii. This Monthly EM&A report presents the environmental monitoring and audit works for the period between 1 September 2016 and 30 September 2016. As informed by the Contractor, major activities in the reporting month were:
  - Carrying out pre-drilling;
  - Construction of guide walls and temporary D-walls;
  - Construction of Socketed H piles;
  - Temporary utility diversion;
  - Excavation and Earth Lateral Support (ELS) construction for Supporting Underground Structure (SUS) and Subway B;
  - Demolition of Radar Tower;
  - Construction of temporary road diversion of Shing Cheong Road
  - Construction of District Cooling System Works; and
  - Implementation of Temporary Traffic Arrangement (TTA).

### **Breaches of the Action and Limit Levels**

- iii. No Action / Limit Level exceedance was recorded for 24-hr TSP and construction noise at KTD1a, KTD2a and KER1a in the reporting month.

### **Complaint, Notification of Summons and Successful Prosecution**

- iv. No environmental complaint and no notification of summons and successful prosecution were received in the reporting month.

### **Reporting Changes**

- v. There was no reporting change in the reporting month.

### **Future Key Issues**

- vi. The key issues to be considered in the coming reporting month include:

Potential environmental impacts arising from the above construction activities are mainly associated with construction dust, construction noise, water quality, waste management and landscape and visual impact.

## 1. INTRODUCTION

### 1.1 Background

1.1.1 The Kai Tak Development is located in the south-eastern part of Kowloon Peninsula of the HKSAR, comprising the apron and runway areas of the former Kai Tak Airport and existing waterfront areas at To Kwa Wan, Ma Tau Kok, Kowloon Bay, Kwun Tong and Cha Kwo Ling.

1.1.2 Contract No. KL/2014/03 is the works package to construct an approximately 420m long supporting underground structure (SUS) underneath Shing Cheong Road and Cheung Yip Street. The EM&A programme under this Contract is governed by three EPs (EP-337/2009, EP-339/2009/A and EP-451/2013) and two EM&A Manuals (AEIAR-130/2009 and AEIAR-174/2013). The Works to be executed under this Contract and corresponding EPs include but not be limited to the following main items:

#### **EP-451/2013 – Trunk Road T2**

(i) Construction of approximately 420m long supporting underground structure (SUS) including diaphragm walls, barrettes, piled foundation, top and bottom slabs, end wall and adits underneath Shing Cheong Road and Cheung Yip Street;

#### **EP-337/2009 – New Distributor Roads Serving the Planned Kai Tak Development**

- (ii) Widening and re-alignment of Cheung Yip Street of approximately 330m long and associated footpaths;
- (iii) Demolition, reconstruction and widening of Shing Cheong Road of approximately 410m long and associated footpaths;
- (iv) Construction of drainage outfall and modification of existing seawall;
- (v) Construction of ancillary works including surface drainage, sewerage, water, fire fighting, street lighting, street furniture, road marking, road signage, utilities and services, irrigation and landscape works.

#### **EP-339/2009/A – Decommissioning of the Remaining Parts (Ex-GFS Building, Radar Station and Hong Kong Aviation Club) of the former Kai Tak Airport**

(vi) Demolition of RADAR Tower and guard house;

#### **Other works not covered by any EP**

- (vii) Construction of two subways between Phase II of New Acute Hospital (Site A) and Hong Kong Children's Hospital (Site C), and between Phase I of New Acute Hospital (Site B) and Site C;
- (viii) Construction of District Cooling System (DCS) along Cheung Yip Street and Shing Cheong Road

1.1.3 The location and boundary of the site is shown in **Figure 1**.

1.1.4 This Monthly EM&A report is required under EP-337/2009 Condition 3.3, EP-339/2009/A Condition 3.3 and EP-451/2013 Condition 3.4. It is to report the results and findings of the EM&A programme required in the EM&A Manuals.

1.1.5 This is the seventh monthly EM&A Report which summaries the impact monitoring results and audit findings for the Project within the period between 1 September 2016 and 30 September 2016.

## 1.2 Project Organization

1.2.1 The project proponent was the Civil Engineering and Development Department, HKSAR (CEDD). Hyder Meinhardt Joint Venture (HMJV) was commissioned by CEDD as the Engineer for the Project. Ramboll Environ Hong Kong Limited was commissioned as the Independent Environmental Checker (IEC). China Road and Bridge Corporation (Hong Kong) (CRBC) was appointed as the main contractor for the construction works under the contract KL/2014/03. Materialab Consultants Limited (MCL) was appointed as the Environmental Team (ET) by CEDD to implement the EM&A programme for the Project.

1.2.2 The organization structure is shown in **Appendix B**. The key personnel contact names and numbers for the Project are summarized in **Table 1.1**.

**Table 1.1 Contact Information of Key Personnel**

Party	Position	Name	Telephone	Fax
Project Proponent (CEDD)	Co-ordinator	Ms. Amy Chu	3106 3172	2369 4980
Engineer's Representative (HMJV)	Chief Resident Engineer	Mr. W. K., Chris Wong	3742 3803	3742 3899
IEC (Ramboll Environ Hong Kong Limited)	Independent Environmental Checker	Mr. F. C. Tsang	3465 2888	3465 2899
Main Contractor (CRBC)	Site Agent	Mr. Chan See Wai, Arnold	9380 4110	2283 1689
	Environmental Officer	Mr. Andy Choy	6278 2693	2283 1689
ET (MCL)	Environmental Team Leader	Mr. Colin Yung	3565 4114	3565 4160

## 1.3 Construction Programme and Activities

1.3.1 The construction of the Project commenced in February 2016 and is expected to complete in 2020. The construction programme is shown in **Appendix A**.

1.3.2 A summary of the major construction activities undertaken in the reporting month were:

- Carrying out pre-drilling;
- Construction of guide walls and temporary D-walls;
- Construction of Socketed H piles;
- Temporary utility diversion;
- Excavation and Earth Lateral Support (ELS) construction for Supporting Underground Structure (SUS) and Subway B;
- Demolition of Radar Tower;
- Construction of temporary road diversion of Shing Cheong Road
- Construction of District Cooling System Works; and
- Implementation of Temporary Traffic Arrangement (TTA).

**1.4 Inter-relationship with the environmental protection/ mitigation measures with the construction programme**

1.4.1 According to the construction activities in the construction programme mentioned in Section 1.3.2, the following environmental protection/ mitigation measures including Air Quality Impact, Construction Noise Impact, Water Quality Impact, Chemical and Waste Management, Landscape and Visual Impact shall be implemented:

- Sufficient watering of the works site with the active dust emitting activities;
- Limitation of the speed for vehicles on unpaved site roads;
- Properly cover or enclosure of the stockpiles and dusty materials;
- Good site practices on loading dusty materials;
- Providing sufficient vehicles washing facilities at every vehicle exit point;
- Good maintenance to the plant and equipment;
- Use of quieter plant and Quality Powered Mechanical Equipment (QPME);
- Use of acoustic fabric and noise barrier;
- Using the approved Non-road Mobile Machineries (NRMMS);
- Proper storage and handling of chemical;
- Appropriate desilting, oil interceptors or sedimentation devices provided on site for treatment before discharge;
- Onsite waste sorting and implementation of trip ticket system;
- Training of the site personnel in proper waste management and chemical waste handling procedures;
- Proper storage of the construction materials;
- Erection of decorative screen hoarding;
- Strictly following the Environmental Permits and Licenses;
- Provide sufficient mitigation measures as recommended in Approved EIA Reports

**1.5 Status of Environmental Licences, Notifications and Permits**

1.5.1 A summary of the relevant environmental licenses, permits and/or notifications on environmental protection for this Contract is presented in **Table 1.2**.

**Table 1.2 Relevant Environmental Licenses, Permits and/or Notifications**

<b>Environmental License / Permit / Notification</b>	<b>Reference Number</b>	<b>Valid From</b>	<b>Valid Till</b>
Environmental Permit	EP-337/2009 EP-339/2009/A EP-451/2013	23 April 2009 18 June 2009 19 September 2013	Not Applicable Not Applicable Not Applicable
Notification pursuant to Air Pollution (Construction Dust) Regulation	395601	16 November 2015	Not Applicable
Billing Account for Waste Disposal	A/C No.: 7023814	30 November 2015	Not Applicable
Construction Noise Permit	GW-RE0538-16	1 June 2016	30 November 2016
Construction Noise Permit	PP-RE0013-16	16 May 2016	15 November 2016
Wastewater Discharge License	WT00023125-2015	6 January 2016	31 January 2021
Chemical Waste Producer License	5213-247-C1232-12	23 November 2015	Not Applicable

**2. AIR QUALITY**

**2.1 Monitoring Requirement**

In accordance with the approved EM&A Manuals, 24-hour Total Suspended Particulates (TSP) level at the designated air quality monitoring station is required. Impact 24-hour TSP monitoring should be carried out at least once every 6 days. In case of complaints, 1-hour TSP monitoring should be carried out at least 3 times per 6 days when the highest dust impacts are likely to occur. The Action and Limit Levels of the air quality monitoring are given in **Appendix C**.

**2.2 Monitoring Equipment**

The 24-hour TSP air quality monitoring was performed using High Volume Air Samplers (HVS) located at each of the designated monitoring station. Portable TSP Monitors would be used in case of complaints for 1-hour TSP monitoring.

**Table 2.1** summarizes the equipment used in air quality monitoring.

**Table 2.1 Air Quality Monitoring Equipment**

Item	Brand	Model	Equipment	Serial Number
1	Tisch	TE-5170 (TSP)	High Volume Sampler	
		TE-300-310X	- Mass Flow Controller	2037
		TE-5005X	- Blower Motor Assembly	3482
		TE-5007X	- Mechanical Timer	4488
		TE-5009X	- Continuous Flow Recorder	4371
2	Tisch	TE-5170 (TSP)	High Volume Sampler	
		TE-300-310X	- Mass Flow Controller	2364
		TE-5005X	- Blower Motor Assembly	3478
		TE-5007X	- Mechanical Timer	4492
		TE-5009X	- Continuous Flow Recorder	4377
3	Tisch	TE-5170 (TSP)	High Volume Sampler	
		TE-300-310X	- Mass Flow Controller	2618
		TE-5005X	- Blower Motor Assembly	3838
		G3031	- Mechanical Timer	2251
		G1051	- Continuous Flow Recorder	2307
4	Tisch	TE-5025A	HVS Sampler Calibrator	0438320 / 2456
5	*Sibata	Model LD-3B	Sibata Portable TSP Monitors	NA

Note:

No complaint of air quality was received. Therefore, no impact 1-hour TSP monitoring was conducted.

**2.3 Monitoring Methodology**

**2.3.1 24-hour TSP air quality monitoring**

HVS Installation

The following guidelines were adopted during the installation of HVS:

- Sufficient support is provided to secure the samplers against gusty wind.
- No two samplers are placed less than 2 meters apart.

- The distance between the sampler and an obstacle, such as buildings, is at least twice the height that the obstacle protrudes above the sampler.
- A minimum of 2 meters of separation from walls, parapets and penthouses is required for rooftop samples.
- A minimum of 2 meters separation from any supporting structure, measured horizontally is required.
- No furnaces or incineration flues are nearby.
- Airflow around the samplers is unrestricted.
- The samplers are more than 20 meters from the drip line.
- Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.

### Filters Preparation

Fiberglass filters (provided by the HOKLAS accredited laboratory) shall be used (Note: these filters have a collection efficiency of larger than 99% for particles of 0.3  $\mu\text{m}$  diameter). A HOKLAS accredited laboratory (ALS Technichem (HK) Pty Ltd.) is responsible for the preparation of 24-hr conditioned and pre-weighed filter papers for monitoring team.

All filters are equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature is around 25°C and not variable by more than  $\pm 3^\circ\text{C}$ ; the relative humidity (RH) is < 50% and not variable by more than  $\pm 5\%$ . A convenient working RH is 40%.

### Operating / Analytical Procedures

Operating / analytical procedures for the air quality monitoring are highlighted as follows:

- Prior to the commencement of the dust sampling, the flow rate of the HVS are properly set (between 0.6  $\text{m}^3/\text{min}$  and 1.7  $\text{m}^3/\text{min}$ ) in accordance with the EM&A manual. The flow rate shall be indicated on the flow rate chart.
- The power supply shall be checked to ensure the samplers worked properly.
- On sampling, the samplers shall be operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air quality monitoring station.
- The filter holding frame is then removed by loosening the four nuts and carefully a weighted and conditioned filter is centered with the stamped number upwards, on a supporting screen.
- The filter shall be aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame is tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges.
- The shelter lid shall be closed and secured with the aluminum strip.
- The timer is then programmed. Information shall be recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number).
- After sampling, the filter shall be removed and sent to laboratory for weighing. The elapsed time is also recorded.
- Before weighing, all filters are equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than  $\pm 3^\circ\text{C}$ ; the relative humidity (RH) should be < 50% and not vary by more than  $\pm 5\%$ . A convenient working RH is 40%. Weighing results are returned to MCL for further analysis of TSP concentrations collected by each filter.

### 2.3.2 1-hour TSP air quality monitoring

#### Operating / Analytical Procedures

The measuring procedures of the 1-hr dust meter are in accordance with the Manufacturer's instruction Manual as follows:

- Pull up the air sampling inlet cover
- Change the Mode 0 to BG once
- Push Start/Stop switch once
- Turn the knob to SENSI.ADJ and press it
- Push Start/Stop switch once
- Return the knob to the position MEASURE slowly
- Push the timer set switch to set measuring time
- Remove the cap and make a measurement

## 2.4 Maintenance / Calibration

### 2.4.1 24-hour TSP air quality monitoring

The following maintenance / calibration are required for the HVS:

- The high volume motors and their accessories are properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking are made to ensure that the equipments and necessary power supply are in good working condition.
- All HVS shall be calibrated (five point calibration) using Calibration Kit upon installation and thereafter in every 3 months.
- A copy of the calibration certificates for the HVS and calibrator are provided in **Appendix D**.

### 2.4.2 1-hour TSP air quality monitoring

The portable TSP monitor should be calibrated at 1 year intervals

## 2.5 Monitoring Locations

2.5.1 According to the EM&A Manual, three air quality monitoring locations, namely KTD1, KTD2 and KER1, are covered by this Contract within the South Apron Area of Former Kai Tak Airport. The other two air quality monitoring locations, which are identified in Cha Kwo Ling area, are farther than 500m away from the site boundary and thus not covered by this Contract. The monitoring works in Cha Kwo Ling area are covered by other Contract(s) respectively.

2.5.2 According to the approved alternative baseline air quality and noise monitoring locations (EPD reference: EP2/K19/A/21 Pt.5), the original monitoring locations (KTD1, KTD2 and KER1) are proposed to be replaced by alternative monitoring locations (KTD1a, KTD2a and KER1a) for air quality monitoring, they are summarized in **Table 2.2** and shown in **Figure 2**.

**Table 2.2 Location of Air Quality Monitoring Station**

Monitoring Station	Location
KTD1a	Centre of Excellence in Paediatrics (Children’s Hospital)
KTD2a	G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1)
KER1a	Site Boundary at Cheung Yip Street

**2.6 Results and Observations**

- 2.6.1 The schedule of air quality monitoring in reporting month is provided in **Appendix E**.
- 2.6.2 No Action / Limit Level exceedance was recorded for 24-hr TSP at KTD1a, KTD2a and KER1a in the reporting month.
- 2.6.3 No complaint of air quality was received. Therefore, no impact 1-hour TSP monitoring was conducted in the reporting month.
- 2.6.4 During the reporting month, major dust sources including loading and unloading of C&D wastes, vehicles movement were observed in the site. Non-project related construction activities at the nearby construction site and road traffic along Shing Cheong Road, Cheung Yip Street and the Kwun Tong By-pass were observed. The above factors may affect the monitoring results.
- 2.6.5 The weather conditions during the monitoring are provided in **Appendix K**.
- 2.6.6 The monitoring data of 24-hr TSP are summarized in **Table 2.3**. Detailed monitoring data are presented in **Appendix F**.

**Table 2.3 Summary of 24-hr TSP Monitoring Results**

Parameter	Monitoring Station	Average ( $\mu\text{g}/\text{m}^3$ )	Range ( $\mu\text{g}/\text{m}^3$ )	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
24-hr TSP in $\mu\text{g}/\text{m}^3$	KTD1a	98	59 – 125	177	260
	KTD2a	57	36 – 83	157	
	KER1a	123	63 – 147	172	

- 2.6.7 The Event and Action Plan for air quality is given in **Appendix H**.

**2.7 Comparison of 24-hr TSP Monitoring Results with EIA Predictions**

- 2.7.1 The monitoring data of 24-hr TSP was compared with the EIA predictions as summarized in **Table 2.4**.

**Table 2.4 Comparison of 24-hr TSP data with EIA predictions**

Monitoring Station	Receiver Reference	Predicted Maximum 24-hour TSP Concentration ( $\mu\text{g}/\text{m}^3$ )	24-hour TSP concentration in September 2016 ( $\mu\text{g}/\text{m}^3$ )	Average 24-hour TSP concentration in September 2016 ( $\mu\text{g}/\text{m}^3$ )
KTD1a	KTD3	126	59 – 125	98
KTD2a	-	-	36 – 83	57
KER1a	KTD6	169	63 – 147	123

Note:

For KTD2a, there was no receiver reference in the EIA report, EIAR-174/2013.

Predicted Maximum TSP Concentration extracted from Table 4.14 of EIA Report, EIAR-174/2013.

- 2.7.2 The 24-hour TSP monitoring results were below the Predicted Maximum 24-hr TSP concentration in the approved Environmental Impact Assessment (EIA) Report and no Action / Limit Level exceedance was recorded in the reporting period.

**3. NOISE**

**3.1 Monitoring Requirement**

In accordance with the approved EM&A Manuals, Leq (30min) monitoring is conducted for at least once a week during the construction phase between 0700 and 1900 on normal weekdays at the designated monitoring locations.

**3.2 Monitoring Equipment**

The sound level meter used in noise monitoring will comply with the International Electrotechnical Commission Publication (IEC) 651:1979 (Type 1) and 804:1985 (Type 1) specifications as referred to in the Technical Memorandum issued under the Noise Control Ordinance (NCO).

Sound level calibrator will be used for the on-site calibration of the meter. This calibrator complies with the IEC Publication 942 (1988) Class 1 and ANSI S1.40 - 1984. Noise measurements were only accepted to be valid if the calibration levels from before and after the measurement agree to within 1.0dB.

Measurements shall be recorded to the nearest 0.1dB. This noise monitors are programmed to measure A-weighted equivalent continuous sound pressure level at 30-minute intervals between 0700 and 1900 on normal weekdays at least once a week when construction activities are underway.

**Table 3.1** summarizes the noise monitoring equipment model being used for this project.

**Table 3.1 Noise Monitoring Equipment**

Item	Brand	Model	Equipment	Serial Number
1	Casella	CEL-63X Series	Integrating Sound Level Meter	3321823
2	Casella	CEL-63X Series	Integrating Sound Level Meter	3756084
3	Casella	CEL-63X Series	Integrating Sound Level Meter	3756127
4	Casella	CEL-120/1	Calibrator	5230736
5	Casella	CEL-120/1	Calibrator	5230742
6	Casella	CEL-120/1	Calibrator	4358251
7	Smart Sensor	AR816+	Wind Speed Anemometer	MC-A-001

**3.3 Monitoring Parameters and Frequency**

**Table 3.2** presents the noise monitoring parameters and frequencies.

**Table 3.2 Monitoring Parameters and Frequencies of Noise Monitoring**

Parameter	Frequency and Period
LAeq (30min) L10 and L90 will be recorded for reference	At each station at 0700-1900 hours on normal weekdays at a frequency of once a week

### 3.4 Monitoring Methodology

The monitoring procedures are as follows:

- The monitoring station is set at a point 1m from the exterior of the sensitive receivers building façade and set at a position 1.2m above the ground.
- The battery condition is checked to ensure good functioning of the meter.
- Parameters such as frequency weighting, the time weighting and the measurement time are set as follows:
  - frequency weighting : A
  - time weighting : Fast
  - measurement time : Weekly 30 minutes between 0700-1900 on normal weekdays
- Prior to and after noise measurement, the meter shall be calibrated using the calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement is more than 1.0 dB, the measurement will be considered invalid and repeat of noise measurement is required after re-calibration or repair of the equipment.
- Noise monitoring should be cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s.
- Noise measurement should be paused during periods of high intrusive noise if possible and observation shall be recorded when intrusive noise is not avoided.
- At the end of the monitoring period, the Leq, L10 and L90 are recorded. In addition, site conditions and noise sources are recorded on a standard record sheet.

### 3.5 Maintenance / Calibration

Maintenance and Calibration procedures are as follows:

- The microphone head of the sound level meter and calibrator should be cleaned with a soft cloth at quarterly intervals.
- The sound level meter and calibrator should be calibrated annually by a HOKLAS laboratory.
- Relevant calibration certificates are provided in **Appendix D**.

### 3.6 Monitoring Locations

3.6.1 According to the EM&A Manual, three noise monitoring locations, namely KTD1, KTD2 and KER1, are covered by this Contract within the South Apron Area of Former Kai Tak Airport. The other two noise quality monitoring locations, which are identified in Cha Kwo Ling area, are farther than 300m away from the site boundary and thus not covered by this Contract. The monitoring works in Cha Kwo Ling area are covered by other Contract(s) respectively.

3.6.2 According to the approved alternative baseline air quality and noise monitoring locations (EPD reference: EP2/K19/A/21 Pt.5), the original monitoring locations (KTD1, KTD2 and KER1) are proposed to be replaced by alternative monitoring locations (KTD1a, KTD2a and KER1a) for noise monitoring, they are summarized in **Table 3.3** and shown in **Figure 2**.

**Table 3.3 Location of Noise Monitoring Station**

Monitoring Station	Location
KTD1a	Centre of Excellence in Paediatrics (Children’s Hospital)
KTD2a	G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1)
KER1a	Site Boundary at Cheung Yip Street

**3.7 Results and Observations**

3.7.1 The schedule of noise monitoring in reporting month is provided in **Appendix E**.

3.7.2 During the monitoring month, at KTD1a, non-project related construction activities at the nearby construction site and road traffic along Shing Cheong Road were observed in the surroundings. At KTD2a, road traffic along the Kwun Tong By-pass was observed. At KER1a, road traffic along Cheung Yip Street was observed. Major noise sources including noise emission from plant & PME and some other construction activities, travel of vehicles, loading and unloading of C&D waste were observed in the site. The above factors may affect the monitoring results.

3.7.3 No raining and wind with speed over 5 m/s was observed during noise monitoring according to the onsite observation. The weather conditions during the monitoring month are provided in **Appendix K**.

3.7.4 The noise monitoring data are summarized in **Table 3.4**. Detailed monitoring data are presented in **Appendix G**.

**Table 3.4 Summary of Noise Impact Monitoring Results**

Time Period	Leq (30min) dB(A) (Range)			Action Level	Limit Level
	Noise Monitoring Stations				
	KTD1a	KTD2a	KER1a		
0700-1900 hrs on normal weekdays	68 - 72	61 - 64	68 - 70	When one documented complaint is received	75 dB(A)

Note:

KTD1a: Façade Measurement

KTD2a & KER1a: Free-field measurement (+3dB(A) correction has been applied)

3.7.5 No Action / Limit Level exceedance was recorded for construction noise in the reporting month.

3.7.6 The Action and Limit Levels for noise impact monitoring have been set are presented in **Appendix C**.

3.7.7 The Event and Action Plan for noise is given in **Appendix H**.

**3.8 Comparison of Noise Monitoring Results with EIA Predictions**

3.8.1 The noise monitoring data was compared with the EIA predictions as summarized in **Table 3.5**.

**Table 3.5 Comparison of Noise Monitoring data with EIA predictions**

Monitoring Station	Receiver Reference	Maximum Predicted Mitigated Construction Noise Level, dB(A)	Leq <sub>(30min)</sub> dB(A) in September 2016
KTD1a	KTD1	74	68 - 72
KTD2a	KTD2	75	61 - 64
KER1a	KER1	75	68 - 70

Note:

Maximum Predicted Mitigated Construction Noise Level extracted from Table 5.13 of EIA Report, EIAR-174/2013.

- 3.8.2 The impact noise monitoring results in the reporting month did not exceed the Maximum Predicted Mitigated Construction Noise Level in the approved Environmental Impact Assessment (EIA) Report and no Action / Limit Level exceedance was recorded in the reporting period.

## **4. LANDSCAPE AND VISUAL**

### **4.1 Audit Requirements**

4.1.1 As per the Trunk Road T2 EM&A Manual, the landscape and visual mitigation measures during the construction phase shall be audited by a Registered Landscape Architect, as a member of the Environmental Team, at least once every two weeks to ensure compliance with the intended aims of the measures.

4.1.2 According to the Kai Tak Development EM&A Manual, measures to mitigate landscape and visual impacts during construction should be checked to ensure compliance with the intended aims of the measures. The progress of the engineering works shall be regularly reviewed onsite to identify the earliest practical opportunities for the landscape works to be undertaken. The ET shall report on the Contractor's compliance on a weekly basis.

### **4.2 Results and Observations**

4.2.1 To monitor and audit the implementation of landscape and visual mitigation measures, five weekly Landscape and Visual Site audits were carried out on 1, 8, 14, 21 and 29 September 2016 and three of them, 1, 14 and 29 September 2016 were carried out by a Registered Landscape Architect. The weekly Landscape and Visual Impact reports were counter-signed by IEC as according to the requirement of EM&A Manual (AEIAR-130/2009).

4.2.2 During the Site audit on 1 September 2016, it is observed that open stockpiles at Portion Q were not fully covered with impervious sheeting. The item was rectified by the Contractor and inspected on 8 September 2016.

4.2.3 During the Site audit on 14 September 2016, it is observed that open stockpiles at Portion I were not fully covered by impervious sheeting. The item was rectified by the Contractor and inspected on 21 September 2016.

4.2.4 During the Site audit on 21 September 2016, it is observed that open stockpiles at Portion F were not fully covered by impervious sheeting. The item was rectified by the Contractor and inspected on 29 September 2016.

4.2.5 During the Site audit on 29 September 2016, it is observed that open stockpiles at Portion I and X were not fully covered by impervious sheeting. The item was rectified by the Contractor and inspected on 6 October 2016.

4.2.6 Should non-compliance of the landscape and visual impact occur, action in accordance to the event action plan presented in **Appendix H** shall be carried out.

## **5. WASTE MANAGEMENT**

### **5.1 Audit Requirements**

5.1.1 The effective management of waste arising during the construction phase will be monitored through the site audit programme. Regular audits and site inspections should be carried out to ensure that the recommended good site practices and other mitigation measures are implemented by the Contractor.

5.1.2 The audit should look at all aspects of on-site waste management practices including the waste generation, storage, recycling, transport and disposal. The aims of waste audit are:

- to ensure the waste arising from the works are handled, stored, collected, transferred and disposed of in an environmentally acceptable manner;
- verify the implementation status and evaluate the effectiveness of the mitigation measures; and
- to encourage the reuse and recycling of material.

### **5.2 Results and Observations**

5.2.1 C&D materials and wastes sorting were carried out on site. Receptacles were available for C&D wastes and general refuse collection.

5.2.2 The amount of wastes generated by the site activities in the reporting month is shown in **Appendix I**.

5.2.3 The Contractor is advised to properly maintain on site C&D materials and wastes collection, sorting and recording system and maximize reuse / recycle of C&D materials and wastes. The Contractor is reminded to properly maintain the site tidiness and dispose of the wastes accumulated on site regularly and properly.

5.2.4 The Contractor is reminded that chemical waste containers should be properly treated and stored temporarily in designated chemical waste storage area on site in accordance with the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes.

## **6. SITE INSPECTION**

### **6.1 Site Inspection**

- 6.1.1 Site inspections were carried out weekly to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. A summary of the mitigation measures implementation schedule is provided in **Appendix J**.
- 6.1.2 In the reporting month, five site inspections were carried out on 1, 8, 14, 21 and 29 September 2016. Two of them, held on 1 and 21 September 2016 were the joint inspections with the IEC, ER, the Contractor and the ET.
- 6.1.3 No outstanding issues were reported during the reporting month. Details of observations recorded during the site inspections are summarized in **Appendix M**.
- 6.1.4 All the follow-up actions requested by Contractor's ET and IEC during the site inspections were undertaken as reported by the Contractor and confirmed in the following weekly site inspection conducted during the reporting month.

## MATERIALLAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars.

### 7. ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE

#### 7.1 Environmental Exceedance

7.1.1 No Action / Limit Level exceedance was recorded for 24-hr TSP and construction noise at KTD1a, KTD2a and KER1a in the reporting month.

#### 7.2 Complaints, Notification of Summons and Prosecution

7.2.1 No complaint, inspection notice, notification of summons or prosecution was received in this reporting month. Cumulative complaint log, summaries of complaints, notification of summons and successful prosecutions are presented in **Appendix L**.

**8. IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES**

**8.1 Implementation Status**

8.1.1 The Contractor has implemented environmental mitigation measures and requirements as stated in the EIA Reports, the EP and the EM&A Manuals. The implementation status of the mitigation measures during the reporting month is summarized in **Appendix J**. Status of required submission under the EP during the reporting period is summarized in **Table 8.1**.

**Table 8.1 Status of Required Submission under Environmental Permit**

EP Condition	Submission	Submission Date
<u>EP-337/2009</u>		
Condition 2.3	Management Organization of Main Construction Companies	18/12/2015
Condition 2.4	Design Drawing of the Project	18/12/2015
Condition 2.11	Landscape Mitigation Plan(s)	18/12/2015
Condition 3.3	Monthly EM&A Report (August 2016)	13/9/2016
<u>EP-339/2009/A</u>		
Condition 2.4	Management Organization of Main Construction Companies	18/12/2015
Condition 2.5	Design Drawing of the Project	18/12/2015
Condition 3.3	Monthly EM&A Report (August 2016)	13/9/2016
<u>EP-451/2013</u>		
Condition 2.3	Management Organization of Main Construction Companies	18/12/2015
Condition 2.4	Design Drawing of the Project	18/12/2015
Condition 2.5	Landscape Mitigation Plan(s)	18/12/2015
Condition 2.10	Supplementary Contamination Assessment Report	18/12/2015
Condition 3.3	Baseline Monitoring Report	12/2/2016
Condition 3.4	Monthly EM&A Report (August 2016)	13/9/2016

## **9. FUTURE KEY ISSUES**

### **9.1 Construction Programme for the Next Two Months**

- Temporary utility diversion;
- Implementation of Temporary Traffic Arrangement (TTA);
- Construction of Socket H piles;
- Setting up temporary barging point;
- Excavation and Earth Lateral Support (ELS) for Supporting Underground Structure (SUS) and Subway B;
- Construction of guide walls and D-walls;
- Construction of District Cooling System Works; and
- Demolition of Radar Tower.

### **9.2 Key Issues for the Coming Month**

- 9.2.1 Potential environmental impacts arising from the above construction activities are mainly associated with construction dust, construction noise, water quality, waste management and landscape and visual impact.

### **9.3 Monitoring Schedules for the Next Three Months**

- 9.3.1 The tentative schedules for environmental monitoring in the coming three months are provided in **Appendix E**.

## 10. CONCLUSIONS

- 10.1.1 24-hour TSP impact monitoring and construction noise monitoring were carried out in the reporting month, no Action / Limit Level exceedance was recorded during the period.
- 10.1.2 No complaint of air quality was received. Therefore, no impact 1-hour TSP monitoring was conducted in the reporting month.
- 10.1.3 Five environmental site inspections were carried out in September 2016. Recommendations on mitigation measures on air quality, water quality, noise, waste management and landscape and visual impact were given to the Contractor for remediating the deficiencies identified during the site inspections.
- 10.1.4 Five weekly Landscape and Visual Site audits were carried out on 1, 8, 14, 21 and 29 September 2016 and three of them, 1, 14 and 29 September 2016 were carried out by a Registered Landscape Architect in the reporting month. The weekly Landscape and Visual Impact reports were counter-signed by IEC as according to the requirement of EM&A Manual (AEIAR-130/2009).
- 10.1.5 Referring to the Contractor's information, no environmental complaint, notification of summons and successful prosecution was received in the reporting month.

### 10.2 Comment and Recommendations

- 10.2.1 The recommended environmental mitigation measures, as proposed in the EIA reports and EM&A Manuals shall be effectively implemented to minimize the potential environmental impacts from the Project. The EM&A programme would effectively monitor the environmental impacts generated from the construction activities and ensure the proper implementation of mitigation measures.
- 10.2.2 According to the environmental audit performed in the reporting month, the following recommendations were made:

#### Air Quality Impact

- Open stockpiles shall be covered by unobtrusive sheeting to prevent dust emission.

#### Construction Noise Impact

- No specific observation was identified in the reporting month.

#### Water Quality Impact

- Muddy surface runoff shall be avoided entering the discharge channel directly.
- More sand bags shall be provided to direct surface run flowing into the mud pit.
- Sediment accumulated in U-channel shall be cleaned up regularly.

#### Chemical and Waste Management

- Chemical and Waste Management shall be provided properly.
- The spilled oil shall be removed properly.
- Oil container shall be stored properly.
- General refuse stored in the skip shall be collected regularly.

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, sans-serif font. The text is white and is set against a black rectangular background that has a thin white border.

---

### Landscape and Visual Impact

- Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance.

### Permit / Licenses

- No specific observation was identified in the reporting month.

**MATERIALAB CONSULTANTS LIMITED**


Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

---



**Figure 1**  
**Project General Layout**

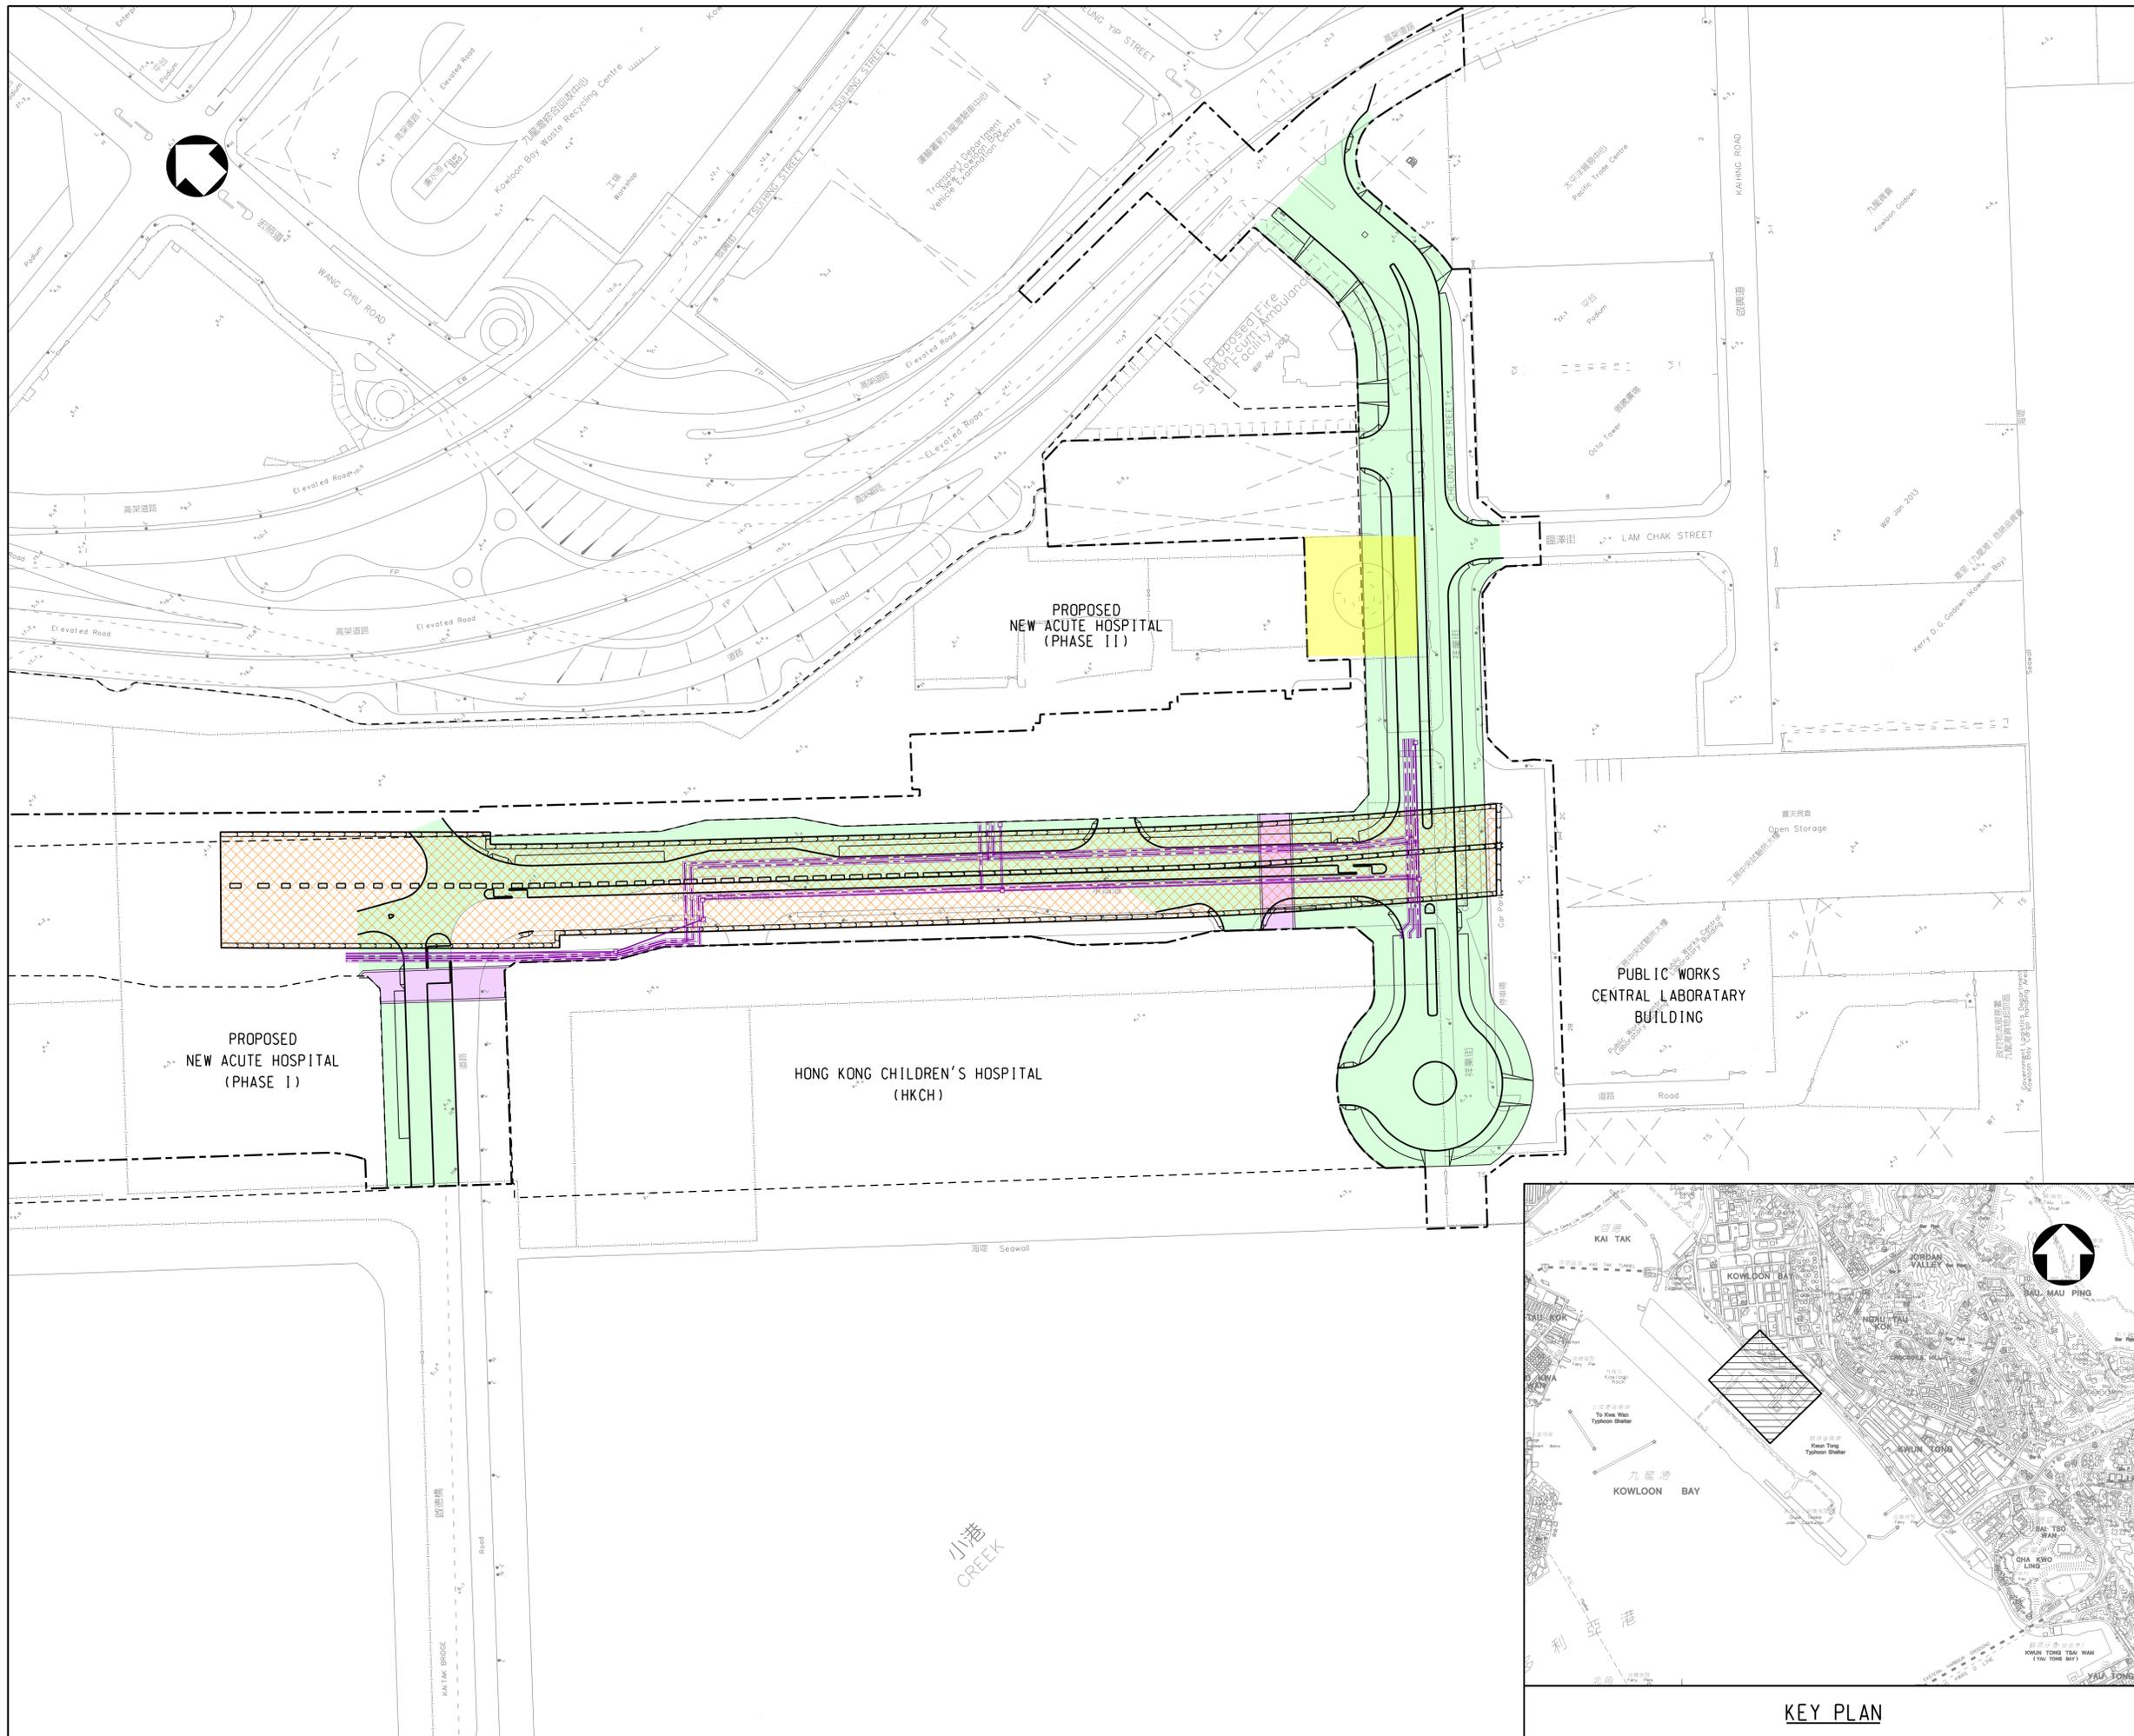

- LEGENDS:**
- SITE BOUNDARY
  - HOSPITAL SITE BOUNDARY
  - PROPOSED SUPPORTING UNDERGROUND STRUCTURE
  - PROPOSED SUBWAYS
  - PROPOSED ROADWORKS
  - PROPOSED DISTRICT COOLING SYSTEM
  - DEMOLITION OF RADAR TOWER

Rev.	Date	Drawn	Description	Checked	Approved



CLIENT



土木工程拓展署  
Civil Engineering and  
Development Department  
九龍拓展處  
Kowloon Development Office

PROJECT

CONTRACT NO. KL/2014/03  
KAI TAK DEVELOPMENT - STAGE 3  
INFRASTRUCTURE WORKS FOR  
DEVELOPMENTS AT THE SOUTHERN PART OF  
THE FORMER RUNWAY


TITLE

GENERAL LAYOUT PLAN

DESIGNED	ENG. CHECK		
DRAWN	COORDINATION		
DWG. CHECK	APPROVED		
SCALE AT A1 1 : 1000	STATUS	REV	A

Drawing No. **FIGURE 1.0**

© Copyright reserved

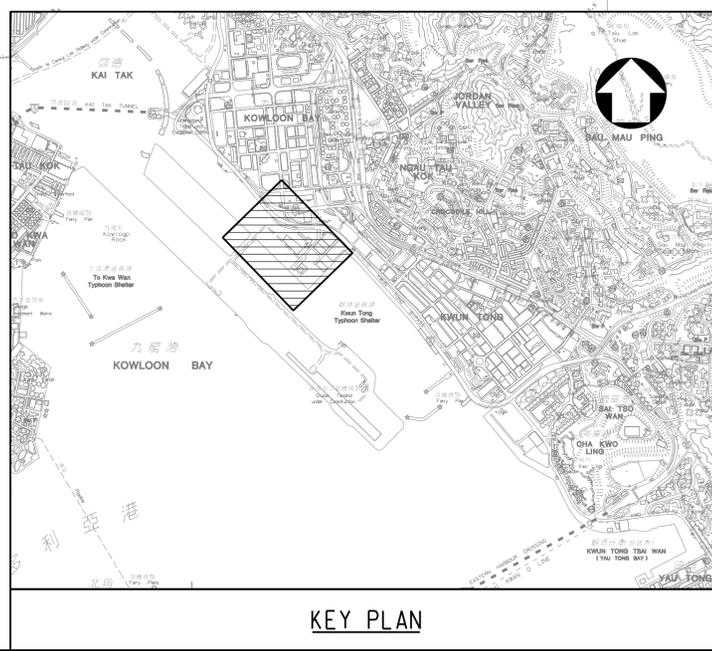

KEY PLAN

PRINTED BY: kitchan 18/2/2015 13:00:43  
FILENAME: K:\91164 Trunk Road T2\Tender Drawing (Contract I)\Figure 1.dgn

**MATERIALAB CONSULTANTS LIMITED**


Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



**Figure 2**

**Air and Noise Monitoring Locations**

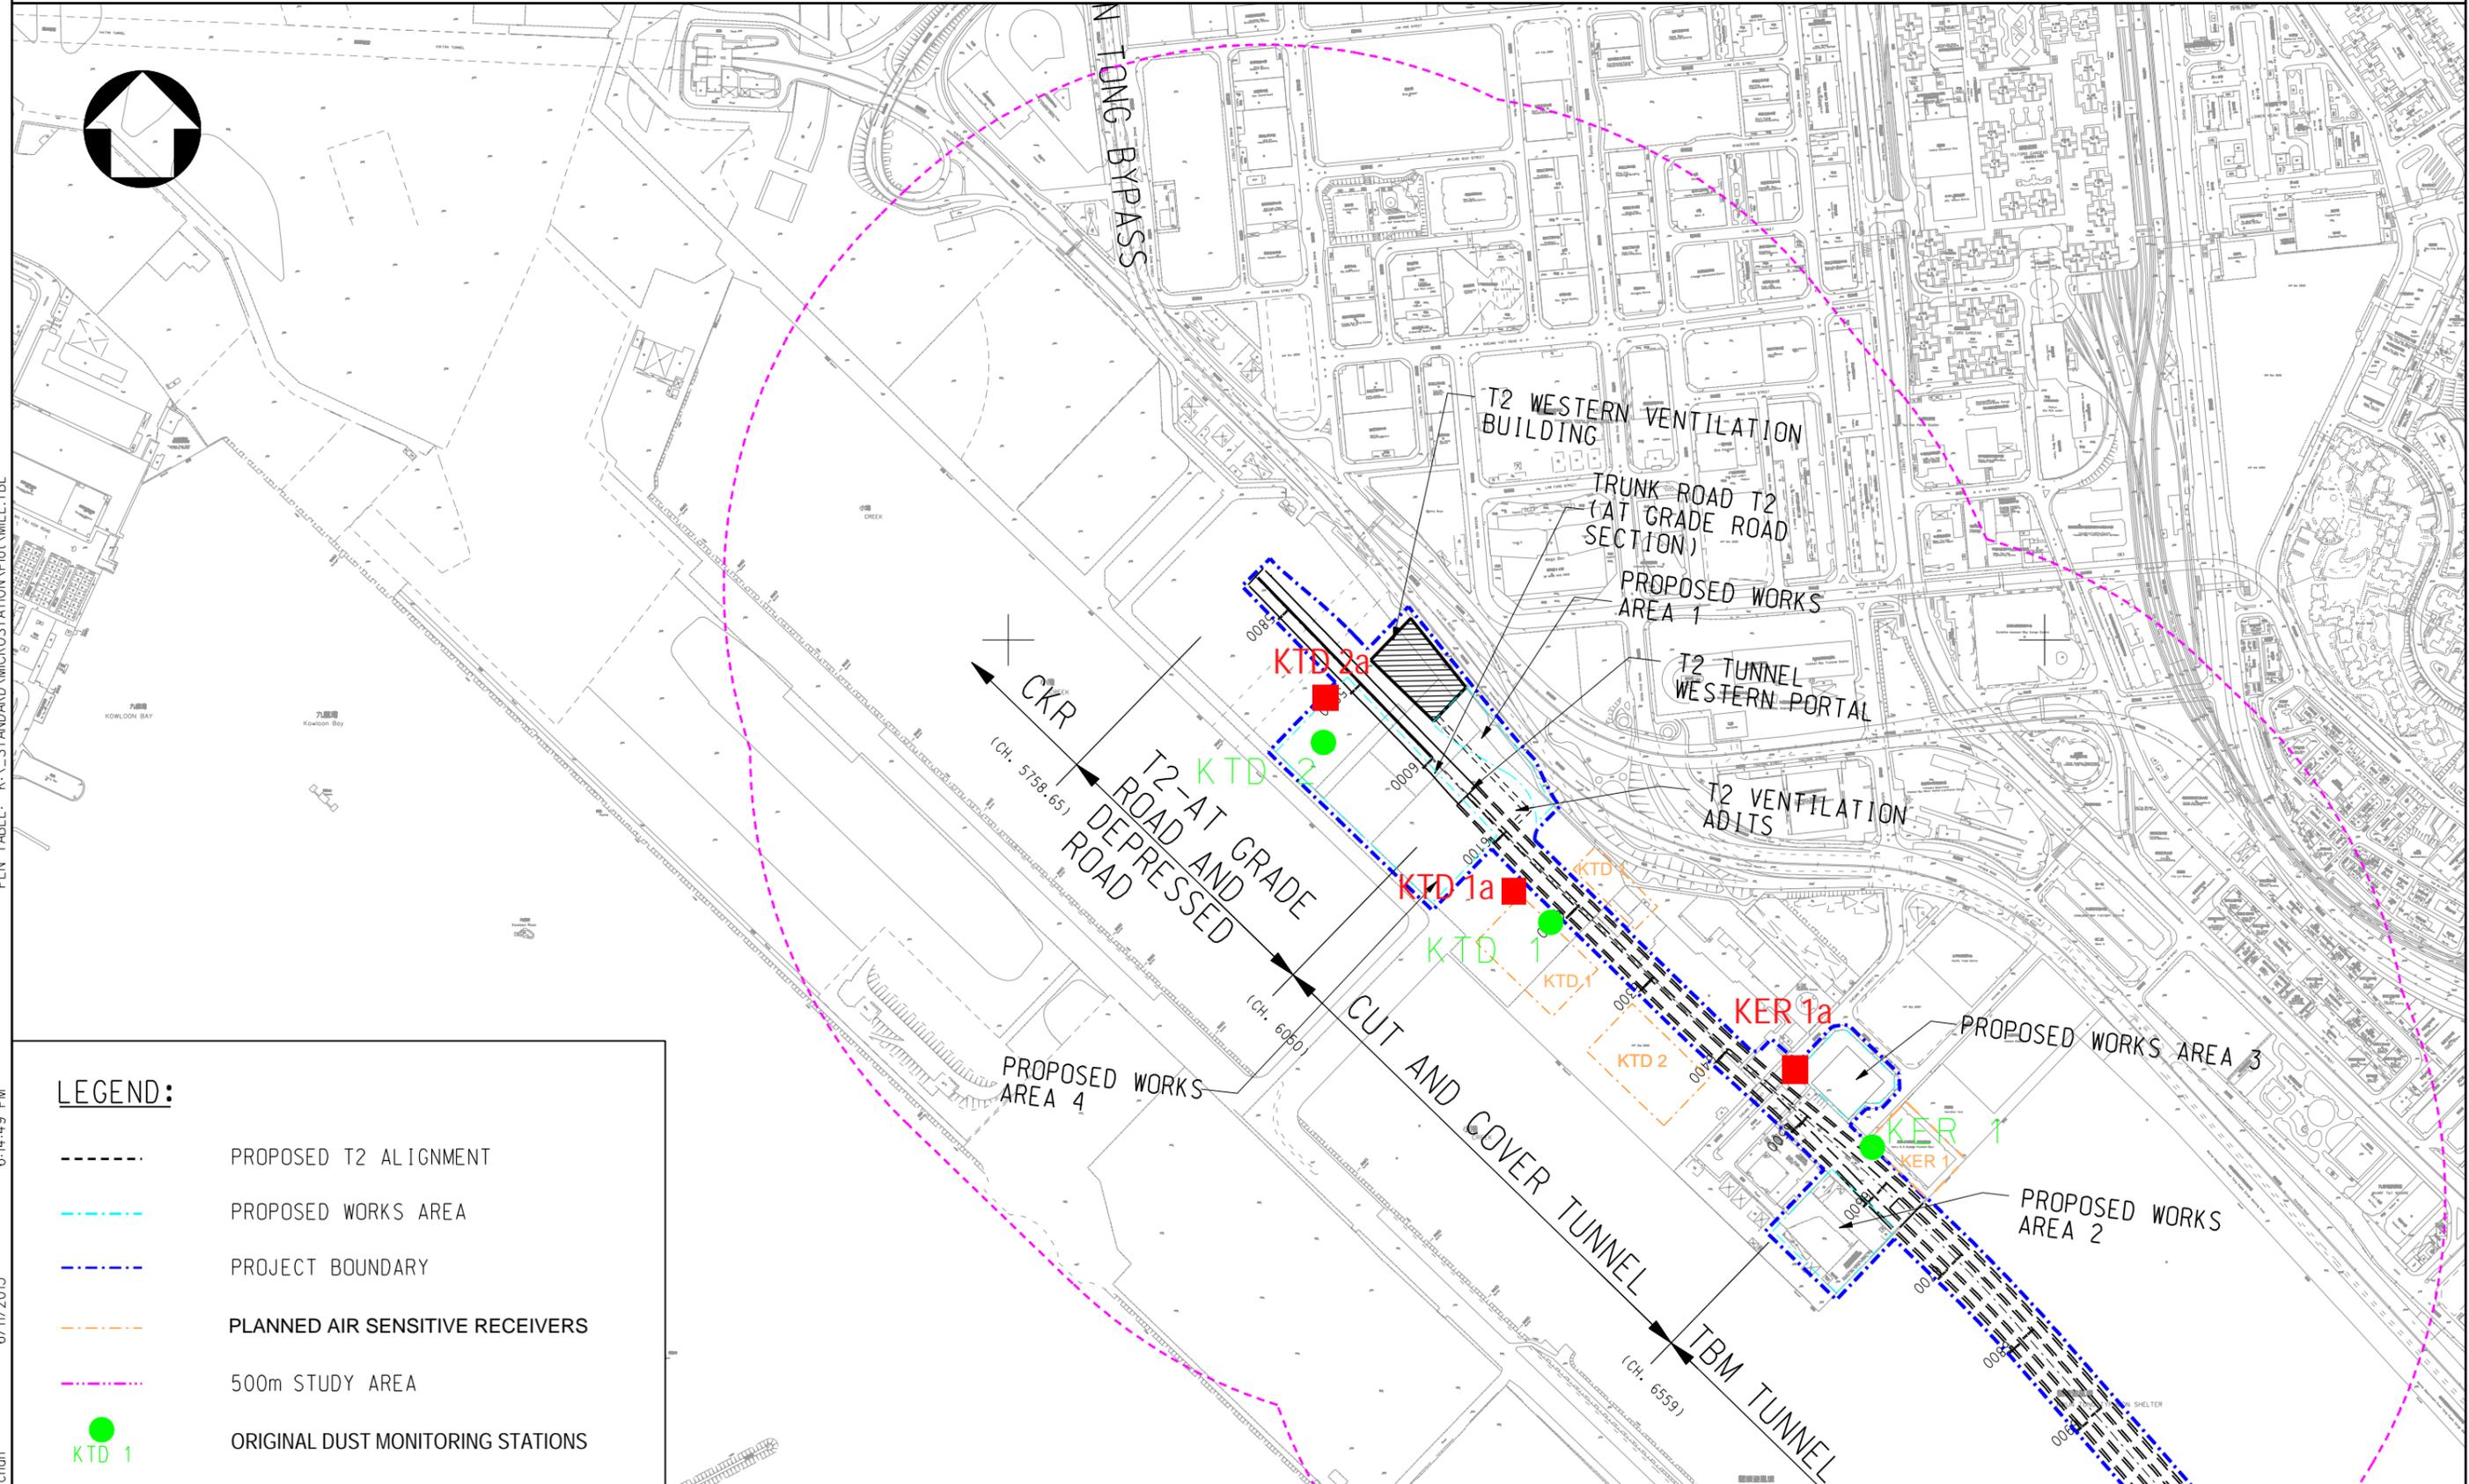

**LEGEND:**

-  PROPOSED T2 ALIGNMENT
-  PROPOSED WORKS AREA
-  PROJECT BOUNDARY
-  PLANNED AIR SENSITIVE RECEIVERS
-  500m STUDY AREA
-  ORIGINAL DUST MONITORING STATIONS


-  PROPOSED DUST MONITORING STATIONS

Drawing title

IDENTIFIED DUST MONITORING STATIONS AT SOUTH APRON OF FORMER KAI TAK AIRPORT

Original Size	A3	Scale	1 : 6000	Date	30/01/2012
© Copyright reserved		File name	Drawing No. FIGURE 2.1a(revised)		
Rev.	Description	Date	Rev. --		

PRINTER NAME: PDFCreator  
 PLOT DRV: k:\91164 Trunk Road t2\Cad Admin\A3\_colour.plt  
 PRINTED BY: kitchen  
 6/11/2013 6:14:49 PM

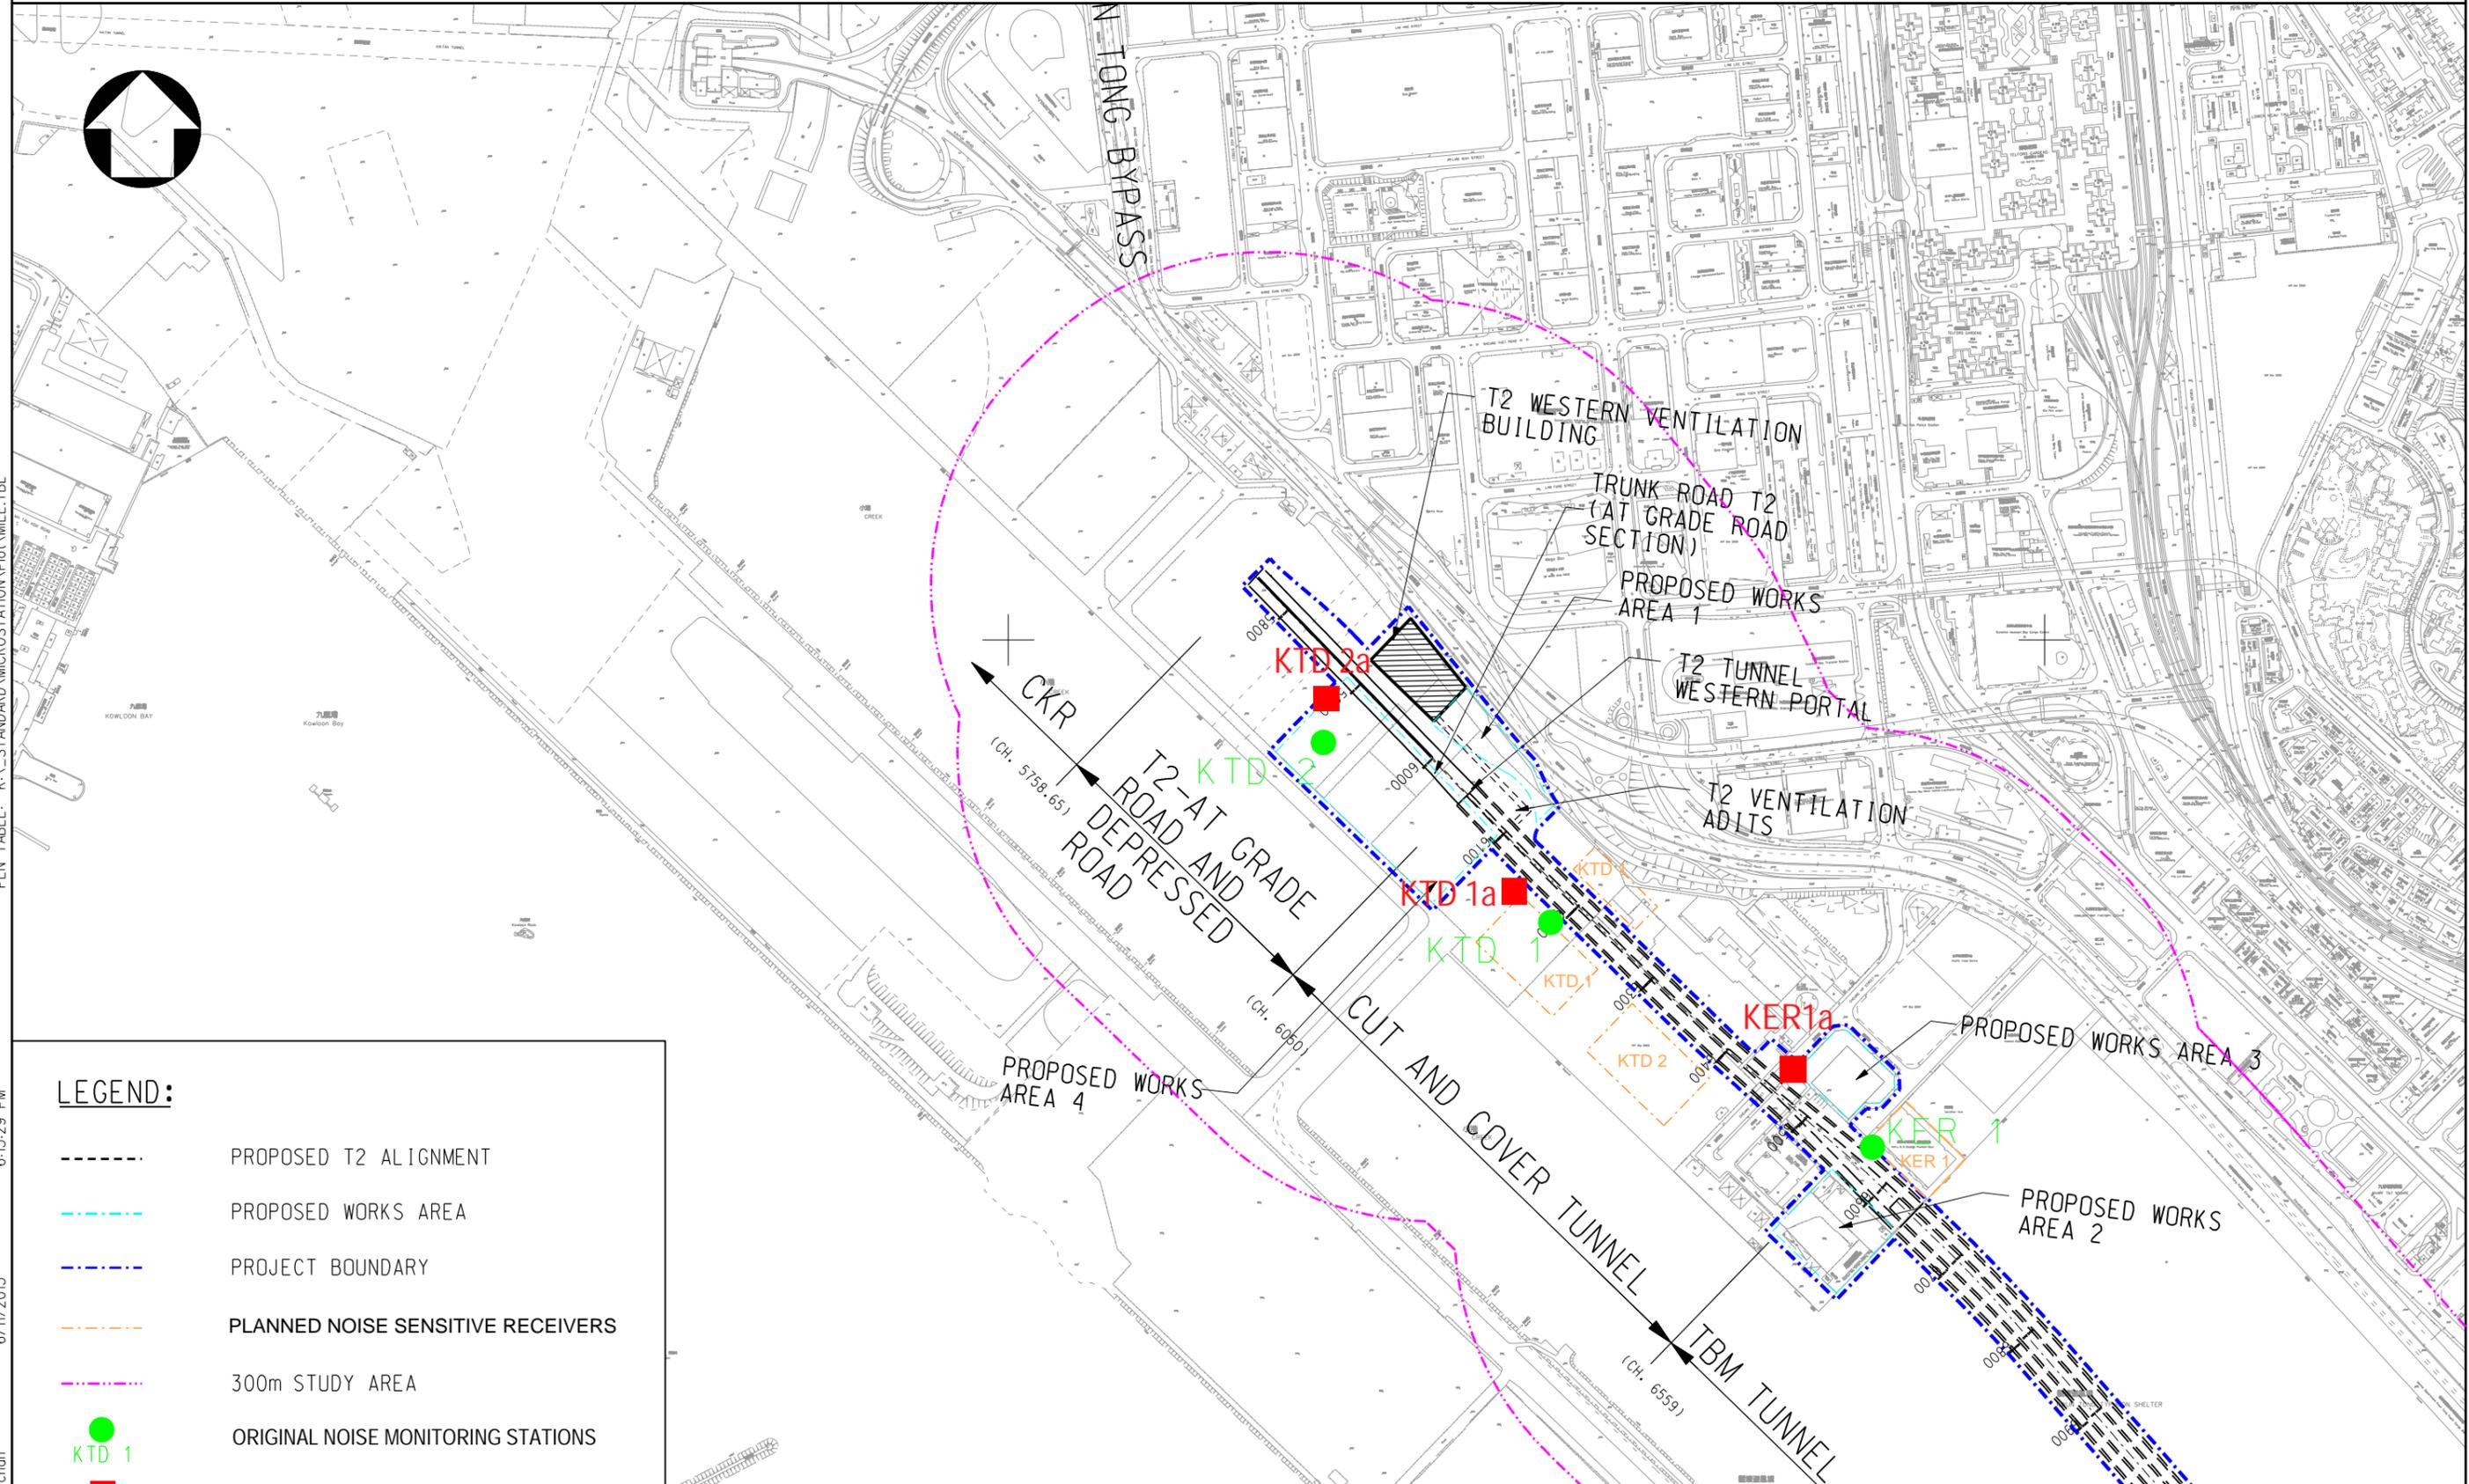

**LEGEND:**

-  PROPOSED T2 ALIGNMENT
-  PROPOSED WORKS AREA
-  PROJECT BOUNDARY
-  PLANNED NOISE SENSITIVE RECEIVERS
-  300m STUDY AREA
-  ORIGINAL NOISE MONITORING STATIONS
-  PROPOSED NOISE MONITORING STATIONS

PRINTER NAME: PDFCreator  
 PLOT DRV: k:\91164 Trunk Road T2\Cad Admin\A3\_colour.plt  
 PRINTED BY: kitchen  
 6/11/2013 6:15:29 PM  
 PEN TABLE: K:\\_STANDARD\MICROSTATION\Plot\MEL.TBL  
 CAD FILE : k:\91164 trunk road t2\report\final\enna report\Figure 3.1a.dgn

Rev.	Description	Date

Drawing title  
**IDENTIFIED NOISE MONITORING STATIONS AT SOUTH APRON OF FORMER KAI TAK AIRPORT**

Original Size	A3	Scale	1 : 6000	Date	30/01/2012
© Copyright reserved		File name			
		Drawing No.	FIGURE 3.1a (revised)		
		Rev.	--		

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

**MaterialLab**

**Appendix A**  
**Construction Programme**

Activity ID	Activity Name	Orig Dur	Rem Dur	Start	Finish	Gantt Chart															
						September						October			November						
						14	21	28	04	11	18	25	02	09	16	23	30	06	13	20	27
<b>KL/2014/03-Stage 3 Infrastructure Works for Developments at the Southern Part of the Fo</b>						1200	1012	04-Jan-16 A	08-Jun-19												
<b>Project Key Dates</b>						1190	1012	01-Feb-16 A	08-Jun-19												
<b>General Submission</b>						248	165	09-May-16 A	11-Feb-17												
<b>Alternative Design Submission and Approval</b>						85	63	13-Jul-16 A	01-Nov-16												
<b>Package B03 : SUS Tunnel box from (CH6+150 to CH6+220)</b>						21	17	13-Jul-16 A	16-Sep-16												
K-PA-ADS-1030	Engineer's review and approval	21	17	13-Jul-16 A	16-Sep-16	Engineer's review and approval															
<b>Package B06 : SUS Top &amp; base slab and intermediate wall from (CH6+220 to CH6+568)</b>						64	63	14-Jul-16 A	01-Nov-16												
K-PA-ADS-1410	Engineer's review and comment	21	21	14-Jul-16 A	20-Sep-16	Engineer's review and comment															
K-PA-ADS-1420	Revise & resubmit DDA drawing (SUS Top & Base slab and Intermediate wall from CH6+220 to CH6+568)	21	21	21-Sep-16	11-Oct-16	Revise & resubmit DDA drawing (SUS Top & Base slab and Intermediate wa															
K-PA-ADS-1430	Engineer's review and approval	21	21	12-Oct-16	01-Nov-16	Engineer's review and approval															
<b>Programming / Reporting</b>						21	30	08-Jun-16 A	20-Oct-16												
<b>Works Programme</b>						21	30	08-Jun-16 A	20-Oct-16												
K-PA-GSP-4300	Acceptance of the Works Programme	21	30	08-Jun-16 A	20-Oct-16	Acceptance of the Works Programme															
<b>Major Temporary Works Design</b>						206	137	09-May-16 A	14-Jan-17												
K-PA-GSP-6820	ELS design for construction of SUS from CH6+220 to CH6+291 in Zone 2 - horizontal members	56	56	31-Aug-16	25-Oct-16	ELS design for construction of SUS from CH6+220 to															
K-PA-GSP-6830	ELS design for construction of SUS from CH6+291 to CH6+568 in Zone 3 to 4 - horizontal members	56	56	18-Oct-16	12-Dec-16																
K-PA-GSP-6840	ELS design for construction of subway A (Bay 1&5)	35	35	18-Nov-16	22-Dec-16																
K-PA-GSP-6860	ELS design for construction of subway B (Bay 3&4)	35	35	26-Sep-16	30-Oct-16	ELS design for construction of subway B (Bay															
K-PA-GSP-6870	Temporary vehicular and pedestrian access for HKCH	35	30	24-Aug-16 A	29-Sep-16	Temporary vehicular and pedestrian access for HKCH															
K-PA-GSP-6880	Formwork and falsework design for construction of tunnel box structure	35	35	18-Sep-16	22-Oct-16	Formwork and falsework design for construction of tunnel															
K-PA-GSP-6900	Falsework design for construction of top slab of SUS structure	35	35	22-Nov-16	26-Dec-16																
K-PA-GSP-6940	Temporary work design for demolition of the existing radar tower	35	12	09-May-16 A	11-Sep-16	Temporary work design for demolition of the existing radar tower															
K-PA-GSP-7000	ELS design for construction of DCS	35	35	29-Aug-16 A	04-Oct-16	ELS design for construction of DCS															
K-PA-GSP-8350	Formwork and falsework design for construction of subway structure	35	5	31-May-16 A	05-Sep-16	Formwork and falsework design for construction of subway structure															
K-PA-GSP-8850	Pumping Test for SUS Cofferdam in Zone 3	56	56	07-Sep-16	01-Nov-16	Pumping Test for SUS Cofferdam in Zone 3															
K-PA-GSP-8870	Pumping Test for SUS Cofferdam in Zone 2	56	56	10-Oct-16	04-Dec-16																
K-PA-GSP-8880	Pumping Test for SUS Cofferdam in Zone 4	56	56	20-Nov-16	14-Jan-17																
K-PA-GSP-9000	Temporary support for existing utilities across SUS in Zone 1	35	35	17-Sep-16	21-Oct-16	Temporary support for existing utilities across SUS in Zone															
<b>Major Construction Works Method Statement</b>						177	108	25-May-16 A	16-Dec-16												
K-PA-GSP-7145	Engineer's comments and approval	28	28	31-Aug-16	27-Sep-16	Engineer's comments and approval															
K-PA-GSP-7305	Engineer's comments and approval	28	19	09-Aug-16 A	18-Sep-16	Engineer's comments and approval															
K-PA-GSP-7400	Method statement for Construction of tunnel box structure	28	28	31-Aug-16	27-Sep-16	Method statement for Construction of tunnel box structure															
K-PA-GSP-7405	Engineer's comments and approval	28	28	28-Sep-16	25-Oct-16	Engineer's comments and approval															
K-PA-GSP-7485	Engineer's comments and approval	28	4	05-Jul-16 A	04-Sep-16	Engineer's comments and approval															
K-PA-GSP-7500	Method statement for Erection and Removal of the temporary support for the utilities	28	28	22-Oct-16	18-Nov-16	Method stateme															
K-PA-GSP-7505	Engineer's comments and approval	28	28	19-Nov-16	16-Dec-16																
K-PA-GSP-7515	Engineer's comments and approval	28	0	25-May-16 A	31-Aug-16	Engineer's comments and approval															
<b>Temporary Utility Diversion Works</b>						169	133	11-Jul-16 A	11-Feb-17												
<b>Temporary Diversion for Watermain Works</b>						92	56	11-Jul-16 A	07-Nov-16												
<b>Laying Proposed (Fresh) Watermain</b>						92	56	11-Jul-16 A	07-Nov-16												
K-PA-TUD-1100	Excavation trench for DN600 MS & DI fresh watermain at subway B & zone 1	37	37	01-Aug-16 A	15-Oct-16	Excavation trench for DN600 MS & DI fresh watermain at subway B &															
K-PA-TUD-1110	Erection temporary support to utilities at zone 1	11	11	03-Oct-16	15-Oct-16	Erection temporary support to utilities at zone 1															
K-PA-TUD-1120	Laying DN600 MS & DI fresh watermain at subway B & zone 1	17	17	03-Oct-16	22-Oct-16	Laying DN600 MS & DI fresh watermain at subway B & zo															
K-PA-TUD-1150	DN600 DI connected (X1 and X2)	0	0		07-Nov-16	DN600 DI connected (X1 and X2)															



Activity ID	Activity Name	Orig Dur	Rem Dur	Start	Finish	Gantt Chart											
						14	21	28	04	11	18	25	02	09	16	23	30
K-PA-TTA-5100	Construction of footpath (CH220 to CH360)	12	5	25-Jul-16 A	05-Sep-16	Construction of footpath (CH220 to CH360)											
K-PA-TTA-5150	Construction of concrete pavement (CH60 to CH200)	15	9	08-Aug-16 A	09-Sep-16	Construction of concrete pavement (CH60 to CH200)											
K-PA-TTA-5200	Construction of footpath and U-channel (CH60 to CH220)	10	9	13-Aug-16 A	09-Sep-16	Construction of footpath and U-channel (CH60 to CH220)											
K-PA-TTA-5250	Construction of concrete pavement (HKCH Access)	5	5	09-Sep-16	14-Sep-16	Construction of concrete pavement (HKCH Access)											
K-PA-TTA-5300	Construction of footpath (Remaining)	5	5	10-Sep-16	15-Sep-16	Construction of footpath (Remaining)											
K-PA-TTA-5350	Installation of street lighting	6	6	01-Sep-16	07-Sep-16	Installation of street lighting											
K-PA-TTA-5400	Setup the TTA	10	10	03-Sep-16	14-Sep-16	Setup the TTA											
K-PA-TTA-5450	Road marking	3	3	15-Sep-16	19-Sep-16	Road marking											
<b>Interfacing Works</b>		0	0	29-Oct-16	29-Oct-16												
K-PA-INT-1000	Joint inspection and handover to connecting watermain (HKCN)	0	0		29-Oct-16	◆ Joint inspection and handover to connecting watermain											
<b>Materials Procurement (Major Materials)</b>		903	738	01-Feb-16 A	07-Sep-18												
<b>ELS struct / waling</b>		138	83	10-Jun-16 A	21-Nov-16												
K-PA-MP-1160	Manufacturing & delivery to site for Zone 1	138	83	10-Jun-16 A	21-Nov-16	Manufacturing & delivery to site for Zone 1											
<b>Steel H-Pile</b>		360	180	01-Feb-16 A	26-Feb-17												
K-PA-MP-1250	Manufacturing & delivery to site	360	180	01-Feb-16 A	26-Feb-17	Manufacturing & delivery to site											
<b>Chilled Water Pipes - DCS</b>		720	720	18-Sep-16	07-Sep-18												
K-PA-MP-1300	Place Order	0	0	18-Sep-16		◆ Place Order											
K-PA-MP-1350	Manufacturing & delivery to site	720	720	18-Sep-16	07-Sep-18	Manufacturing & delivery to site											
<b>Preliminaries</b>		1190	1012	11-Mar-16 A	08-Jun-19												
K-DR-PRE-1800	Submission of time-lapsed photographs and video	1190	1012	11-Mar-16 A	08-Jun-19	Submission of time-lapsed photographs and video											
<b>Barge Loading Facilities</b>		105	36	31-May-16 A	06-Oct-16												
K-DR-PRE-1400	Submit temporary works design and method statement for barging point	35	9	31-May-16 A	08-Sep-16	Submit temporary works design and method statement for barging point											
K-DR-PRE-1450	Set up temporary barging point	21	21	09-Sep-16	05-Oct-16	Set up temporary barging point											
K-DR-PRE-1480	Operation of the barging point	0	0	06-Oct-16		◆ Operation of the barging point											
<b>Instrumentation and Monitoring</b>		124	66	18-Apr-16 A	18-Nov-16												
<b>Eastbound Instrumentation and Monitoring</b>		113	55	18-Apr-16 A	07-Nov-16												
<b>Ground Settlement Marker (GSM)</b>		99	26	29-Apr-16 A	30-Sep-16												
K-IM-GSM-1100	Installation of GSM at Zone 2	10	18	29-Apr-16 A	21-Sep-16	Installation of GSM at Zone 2											
K-IM-GSM-1200	Installation of GSM at Zone 3	10	21	11-May-16 A	24-Sep-16	Installation of GSM at Zone 3											
K-IM-GSM-1300	Installation of GSM at Zone 4	10	26	10-Jun-16 A	30-Sep-16	Installation of GSM at Zone 4											
<b>Extensometer (EXT)</b>		104	26	18-Apr-16 A	30-Sep-16												
K-IM-EXT-1100	Installation of EXT at Zone 2	15	26	18-Apr-16 A	30-Sep-16	Installation of EXT at Zone 2											
K-IM-EXT-1300	Installation of EXT at Zone 4	15	26	19-May-16 A	30-Sep-16	Installation of EXT at Zone 4											
<b>Piezometer/Standpipe (PZR)</b>		10	26	04-Jun-16 A	30-Sep-16												
K-IM-PZR-1300	Installation of PZR at Zone 4	10	26	04-Jun-16 A	30-Sep-16	Installation of PZR at Zone 4											
<b>Inclinometer (INC)</b>		10	10	26-Oct-16	07-Nov-16												
K-IM-INC-1200	Installation of INC at Zone 3	10	10	26-Oct-16	07-Nov-16	Installation of INC at Zone 3											
<b>Westbound Instrumentation and Monitoring</b>		115	66	19-Jul-16 A	18-Nov-16												
<b>Extensometer (EXT)</b>		66	66	31-Aug-16	18-Nov-16												
K-IM-EXT-1320	Installation of EXT at Zone 2	15	15	02-Nov-16	18-Nov-16	Installation of EXT at Zone 2											
K-IM-EXT-1330	Installation of EXT at Zone 3	15	15	31-Aug-16	17-Sep-16	Installation of EXT at Zone 3											
K-IM-EXT-1340	Installation of EXT at Zone 4	15	15	15-Oct-16	01-Nov-16	Installation of EXT at Zone 4											
<b>Piezometer/Standpipe (PZR)</b>		105	56	19-Jul-16 A	07-Nov-16												
K-IM-PZR-1320	Installation of PZR at Zone 2	10	10	27-Oct-16	07-Nov-16	Installation of PZR at Zone 2											

Activity ID	Activity Name	Orig Dur	Rem Dur	Start	Finish	Gantt Chart											
						September				October				November			
						14	21	28	04	11	18	25	02	09	16	23	30
K-IM-PZR-1330	Installation of PZR at Zone 3	10	25	05-Aug-16 A	29-Sep-16	Installation of PZR at Zone 3											
K-IM-PZR-1340	Installation of PZR at Zone 4	10	10	19-Jul-16 A	26-Oct-16	Installation of PZR at Zone 4											
<b>Section 1A of the Works - Construction of Supporting Underground Structure (Alternative Design)</b>																	
<b>SUS and Ventilation Adits from CH6+150 to CH6+220 in Zone 1</b>																	
<b>Preparation Works</b>																	
K-1A-SV1-0500	Fabrication and delivery of ELS strut/waling	120	30	10-May-16 A	06-Oct-16	Fabrication and delivery of ELS strut/waling											
<b>Construction of Socketed H-Pile</b>																	
K-1A-SV1-3300	Loading test for socketed H-Piles	8	2	09-Aug-16 A	01-Sep-16	Loading test for socketed H-Piles											
K-1A-SV1-3400	Trimming pilehead at cut-off level	40	40	11-Nov-16	29-Dec-16												
<b>Excavation and ELS Construction</b>																	
K-1A-SV1-4950	Concrete Clearance	5	13	04-Aug-16 A	14-Sep-16	Concrete Clearance											
K-1A-SV1-5050	Excavation and ELS to +2mPD & Railing Installation	17	17	03-Sep-16	23-Sep-16	Excavation and ELS to +2mPD & Railing Installation											
K-1A-SV1-5100	Excavation and ELS to S1 (CH6+150 to CH6+220)	17	17	19-Sep-16	08-Oct-16	Excavation and ELS to S1 (CH6+150 to CH6+220)											
K-1A-SV1-5200	Excavation and ELS to S2 (CH6+150 to CH6+220)	20	20	24-Sep-16	19-Oct-16	Excavation and ELS to S2 (CH6+150 to CH6+220)											
K-1A-SV1-5350	Excavation and ELS to S3 (CH6+150 to CH6+220)	21	21	06-Oct-16	31-Oct-16	Excavation and ELS to S3 (CH6+150 to CH6+220)											
K-1A-SV1-5400	Excavation to Formation Level (CH6+185 to CH6+220)	6	6	27-Oct-16	02-Nov-16	Excavation to Formation Level (CH6+185 to CH6+220)											
K-1A-SV1-5450	Excavation and ELS to S4 (CH6+150 to CH6+185)	15	15	17-Oct-16	02-Nov-16	Excavation and ELS to S4 (CH6+150 to CH6+185)											
K-1A-SV1-5460	Excavation and ELS to S5 (CH6+150 to CH6+185)	9	9	29-Oct-16	08-Nov-16	Excavation and ELS to S5 (CH6+150 to CH6+185)											
K-1A-SV1-5550	Excavation to Formation Level (CH6+150 to CH6+185)	5	5	05-Nov-16	10-Nov-16	Excavation to Formation Level (CH6+150 to CH6+185)											
K-1A-SV1-5650	Sheet pile installation for ventilation adit 2 (VA2) construction (CH6+150 to CH6+220)	28	28	20-Oct-16	21-Nov-16	Sheet pile installation for ventilation adit 2 (VA2) construction (CH6+150 to CH6+220)											
K-1A-SV1-5700	Excavation and ELS to formation -18.0mPD for VA2 construction (CH6+150 to CH6+175)	20	20	11-Nov-16	03-Dec-16	Excavation and ELS to formation -18.0mPD for VA2 construction (CH6+150 to CH6+175)											
K-1A-SV1-5750	Excavation and ELS to formation -17.2mPD for VA2 construction (CH6+175 to CH6+220)	30	30	22-Nov-16	28-Dec-16	Excavation and ELS to formation -17.2mPD for VA2 construction (CH6+175 to CH6+220)											
<b>SUS and Ventilation Adits from CH6+220 to CH6+291 in Zone 2</b>																	
<b>G.I and Pre-drilling Works</b>																	
K-1A-SV2-3800	Predrilling works (5 nos) after diversion of CLP cable by other	30	18	10-Aug-16 A	21-Sep-16	Predrilling works (5 nos) after diversion of CLP cable by other											
<b>Construction of Socketed H-Pile</b>																	
K-1A-SV2-3170	Installation of socketed H-piles HPC40-HPC45	20	20	20-Sep-16	14-Oct-16	Installation of socketed H-piles HPC40-HPC45											
K-1A-SV2-3180	Installation of socketed H-piles HPC46-HPC50	14	14	05-Oct-16	21-Oct-16	Installation of socketed H-piles HPC46-HPC50											
K-1A-SV2-3190	Installation of socketed H-piles HPC51-HPC55	14	14	17-Oct-16	01-Nov-16	Installation of socketed H-piles HPC51-HPC55											
K-1A-SV2-3192	Installation of socketed H-piles HPC51-HPC55	14	14	27-Oct-16	11-Nov-16	Installation of socketed H-piles HPC51-HPC55											
<b>W/B Construction of D-Wall in TTA Stage 1A</b>																	
K-1A-SV2-4900	Implementation of TTA stage 1A	0	0	20-Sep-16	20-Sep-16	Implementation of TTA stage 1A											
<b>SUS Structure from CH6+291 to 6+467 in Zone 3</b>																	
<b>E/B Construction of D-Wall</b>																	
K-1A-SV3-2000	Construction of guide wall	65	76	08-Jun-16 A	30-Nov-16	Construction of guide wall											
K-1A-SV3-2250	Construction of D-wall eastbound (CH6+291 to CH6+344)	28	10	18-Jul-16 A	10-Sep-16	Construction of D-wall eastbound (CH6+291 to CH6+344)											
K-1A-SV3-2300	Construction of D-wall eastbound (CH6+344 to CH6+405)	28	18	16-Aug-16 A	21-Sep-16	Construction of D-wall eastbound (CH6+344 to CH6+405)											
K-1A-SV3-2350	Construction of D-wall eastbound (CH6+405 to CH6+436)	14	14	22-Sep-16	08-Oct-16	Construction of D-wall eastbound (CH6+405 to CH6+436)											
K-1A-SV3-2360	Construction of D-wall eastbound (CH6+436 to CH6+467)	14	14	11-Oct-16	26-Oct-16	Construction of D-wall eastbound (CH6+436 to CH6+467)											
K-1A-SV3-2400	Testing of D-wall (Sonic test and IC)	30	30	27-Oct-16	30-Nov-16	Testing of D-wall (Sonic test and IC)											
<b>Construction of Socketed H-Pile</b>																	
K-1A-SV3-3050	Installation of socketed H-piles HPC56-HPC60	14	14	08-Nov-16	23-Nov-16	Installation of socketed H-piles HPC56-HPC60											
K-1A-SV3-3055	Installation of socketed H-piles HPC74-HPC75	10	10	27-Sep-16	08-Oct-16	Installation of socketed H-piles HPC74-HPC75											
K-1A-SV3-3060	Installation of socketed H-piles HPC76-HPC80	14	14	11-Oct-16	26-Oct-16	Installation of socketed H-piles HPC76-HPC80											

Activity ID	Activity Name	Orig Dur	Rem Dur	Start	Finish	Gantt Chart																	
						August				September				October				November					
						4	11	18	25	1	8	15	22	29	5	12	19	26	2	9	16	23	30
K-1A-SV3-3065	Installation of socketted H-piles HPC81-HPC85	14	14	22-Oct-16	07-Nov-16																		
K-1A-SV3-3070	Installation of socketted H-piles HPC86-HPC90	14	14	03-Nov-16	18-Nov-16																		
K-1A-SV3-3075	Installation of socketted H-piles HPC91-HPC95	14	14	15-Nov-16	30-Nov-16																		
K-1A-SV3-3080	Installation of socketted H-piles HPC96-HPC100	14	14	26-Nov-16	12-Dec-16																		
<b>W/B Construction of D-Wall in TTA Stage 1A</b>		73	73	20-Sep-16	15-Dec-16																		
K-1A-SV3-4000	Construction of guide wall for westbound (CH6+405 to CH6+467)	25	25	20-Sep-16	20-Oct-16																		
K-1A-SV3-4005	Construction of guide wall for westbound (CH6+344 to CH6+405)	25	25	21-Oct-16	18-Nov-16																		
K-1A-SV3-4100	Plant set up for D-wall	5	5	23-Sep-16	28-Sep-16																		
K-1A-SV3-4200	Construction of D-wall westbound (CH6+405 to CH6+467)	32	32	30-Sep-16	08-Nov-16																		
K-1A-SV3-4300	Construction of D-wall westbound (CH6+344 to CH6+405)	32	32	09-Nov-16	15-Dec-16																		
<b>SUS Structure from CH6+467 to 6+568 in Zone 4</b>		147	89	17-Jun-16 A	15-Dec-16																		
<b>G.I and Pre-drilling Works</b>		43	42	30-Jul-16 A	21-Oct-16																		
K-1A-SV4-1200	Predrilling works (13 nos) after diversion of CLP cable by other	42	42	30-Jul-16 A	21-Oct-16																		
K-1A-SV4-1300	Predrilling works (3 nos) after road diversion at TTA stage 1A	18	18	20-Sep-16	12-Oct-16																		
<b>E/B Construction of D-Wall</b>		27	27	15-Oct-16	15-Nov-16																		
K-1A-SV4-2100	Construction of guide wall	25	25	15-Oct-16	12-Nov-16																		
K-1A-SV4-2400	Construction of D-wall eastbound(CH6+550 to CH6+560)	14	14	31-Oct-16	15-Nov-16																		
<b>Construction of Socketed H-Pile</b>		142	84	17-Jun-16 A	09-Dec-16																		
K-1A-SV4-3000	Installation of socketted H-piles(CH6+467 to CH6+500)	32	3	17-Jun-16 A	02-Sep-16																		
K-1A-SV4-3200	Installation of socketted H-piles(CH6+500 to CH6+520)	56	19	11-Jul-16 A	26-Sep-16																		
K-1A-SV4-7610	Installation of socketted H-piles(CH6+520 to CH6+530)	14	14	24-Nov-16	09-Dec-16																		
<b>W/B and End Construction of D-Wall in TTA Stage 1A</b>		73	73	20-Sep-16	15-Dec-16																		
K-1A-SV4-4000	Construction of guide wall	35	35	05-Nov-16	15-Dec-16																		
K-1A-SV4-4100	Implementation of TTA stage 1A	3	3	20-Sep-16	22-Sep-16																		
K-1A-SV4-4300	Construction of D-wall westbound (CH6+550 to CH6+560)	14	14	16-Nov-16	01-Dec-16																		
<b>Section 2 of the Works-Demolition of Radar Tower and Guard House</b>		80	85	05-Aug-16 A	10-Dec-16																		
<b>Demolition of Radar Tower</b>		80	85	05-Aug-16 A	10-Dec-16																		
K-02-DRT-1400	Demolition and removal of 13/F to Roof	40	5	05-Aug-16 A	05-Sep-16																		
K-02-DRT-1500	Demolition and removal of 12/F	20	20	06-Sep-16	29-Sep-16																		
K-02-DRT-1510	Demolition and removal of 11/F	20	20	30-Sep-16	25-Oct-16																		
K-02-DRT-1520	Demolition and removal of 10/F	14	14	26-Oct-16	10-Nov-16																		
K-02-DRT-1530	Demolition and removal of 9/F	14	14	11-Nov-16	26-Nov-16																		
K-02-DRT-1600	Demolition and removal of 8/F	12	12	28-Nov-16	10-Dec-16																		
<b>Section 3 of the Works- Construction of District Cooling System (Subject to Excision)</b>		780	738	02-Jun-16 A	07-Sep-18																		
<b>Preparation Works</b>		780	738	02-Jun-16 A	07-Sep-18																		
K-03-DCS-0800	Perpare and submit setting out and profile of the DCS pipeline	30	12	02-Jun-16 A	11-Sep-16																		
K-03-DCS-0950	Manufacturing & delivery of DCS pipe	720	720	18-Sep-16	07-Sep-18																		
<b>Construction of District Cooling System</b>		68	68	24-Sep-16	14-Dec-16																		
<b>Construction of DCS Works at Zone 1</b>		68	68	24-Sep-16	14-Dec-16																		
K-03-DCS-1050	Construction of DSC Washout Pit (CHR5-000)	30	30	24-Sep-16	31-Oct-16																		
K-03-DCS-1100	Installation of sheetpile	10	10	01-Nov-16	11-Nov-16																		
K-03-DCS-1150	Excavation and ELS works	14	14	12-Nov-16	28-Nov-16																		
K-03-DCS-1200	Laying chilled water pipes from CHR5-000 to CHR5-024	14	14	29-Nov-16	14-Dec-16																		
<b>Section 4B of the Works- Construction of Subway B (Subject to Excision)</b>		69	53	12-Aug-16 A	03-Nov-16																		

Activity ID	Activity Name	Orig Dur	Rem Dur	Start	Finish	Gantt Chart															
						September				October				November							
						14	21	28	04	11	18	25	02	09	16	23	30	06	13	20	27
<b>Bay 1 &amp; 2</b>						69	53	12-Aug-16 A	03-Nov-16												
K-4B-BAY-2200	Construction of base slab at Bay 1	12	0	12-Aug-16 A	31-Aug-16 A	Construction of base slab at Bay 1															
K-4B-BAY-2250	Construction of wall and top slab at Bay 1	16	17	19-Aug-16 A	20-Sep-16	Construction of wall and top slab at Bay 1															
K-4B-BAY-2260	Rebar fixing works of wall and top slab at Bay 1	3	3	21-Sep-16	23-Sep-16	Rebar fixing works of wall and top slab at Bay 1															
K-4B-BAY-2300	Construction of base slab at Bay 2	12	0	12-Aug-16 A	31-Aug-16 A	Construction of base slab at Bay 2															
K-4B-BAY-2350	Rebar fixing works of wall and top slab at Bay 2	16	17	22-Aug-16 A	20-Sep-16	Rebar fixing works of wall and top slab at Bay 2															
K-4B-BAY-2360	Concreting of wall and top slab at Bay 2	3	3	21-Sep-16	23-Sep-16	Concreting of wall and top slab at Bay 2															
K-4B-BAY-2400	Laying waterproofing and protective screeding (Bay 1 to Bay 2)	5	5	24-Sep-16	29-Sep-16	Laying waterproofing and protective screeding (Bay 1 to Bay 2)															
K-4B-BAY-2450	Backfilling (Bay 1 and Bay 2) to half wall level	14	14	30-Sep-16	18-Oct-16	Backfilling (Bay 1 and Bay 2) to half wall level															
K-4B-BAY-2460	Backfilling (Bay 1 and Bay 2) to top slab level	14	14	19-Oct-16	03-Nov-16	Backfilling (Bay 1 and Bay 2) to top slab level															
<b>Section 7 of the Works-Preservation and Protection of Existing Trees</b>						1200	1008	04-Jun-16 A	04-Jun-19												
K-07-001-1000	Section 7 of the Works-Preservation and Protection of Existing Trees	1200	1008	04-Jan-16 A	04-Jun-19																

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk





**Appendix B**

**Project Organization Chart**

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

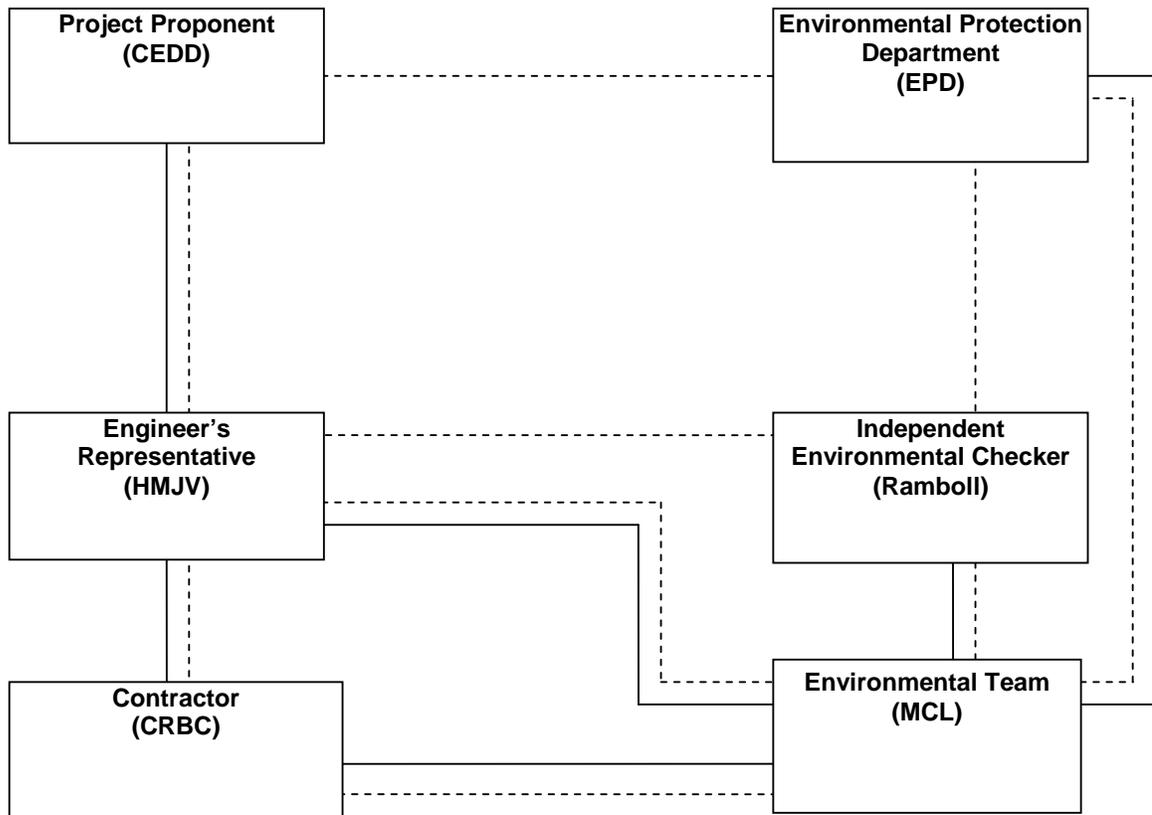

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars, one above and one below the text.

### **Appendix C**

#### **Action and Limit Levels for Air Quality and Noise**

**MATERIALAB CONSULTANTS LIMITED**

Room 723 &amp; 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

**MaterialLab****Action and Limit Levels for 24-hr TSP and 1-hr TSP**

Parameter	Monitoring Station	Action Level ( $\mu\text{g}/\text{m}^3$ )	Limit Level ( $\mu\text{g}/\text{m}^3$ )
24-hr TSP ( $\mu\text{g}/\text{m}^3$ )	KTD1a	177	260
	KTD2a	157	
	KER1a	172	
*1-hr TSP ( $\mu\text{g}/\text{m}^3$ )	KTD1a	285	500
	KTD2a	279	
	KER1a	295	

Note:

1-hr TSP monitoring should be required in case of complaints.

**Action and Limit Levels for Construction Noise, Leq (30min), dB(A)**

Time Period	Location	Action	Limit
0700-1900 hrs on normal weekdays	KTD1a KTD2a KER1a	When one documented complaint is received	75 dB(A)

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars, one above and one below the text.

### **Appendix D**

#### **Calibration Certificates of Monitoring Equipment**



TISCH ENVIRONMENTAL, INC.  
 145 SOUTH MIAMI AVE  
 VILLAGE OF CLEVELS, OH  
 45002  
 513.467.9000  
 877.263.7610 TOLL FREE  
 513.467.9009 FAX

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Jan 14, 2016 Rootsmeter S/N 0438320 Ta (K) - 292  
 Operator Tisch Orifice I.D. - 2456 Pa (mm) - 748.03

PLATE OR Run #	VOLUME START (m3)	VOLUME STOP (m3)	DIFF VOLUME (m3)	DIFF TIME (min)	METER	ORFICE
					DIFF Hg (mm)	DIFF H2O (in.)
1	NA	NA	1.00	1.4420	3.2	2.00
2	NA	NA	1.00	1.0220	6.4	4.00
3	NA	NA	1.00	0.9130	7.9	5.00
4	NA	NA	1.00	0.8670	8.8	5.50
5	NA	NA	1.00	0.7170	12.7	8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)	Va	(x axis) Qa	(y axis)
1.0002	0.6936	1.4174	0.9957	0.6905	0.8836
0.9959	0.9745	2.0045	0.9915	0.9701	1.2496
0.9938	1.0885	2.2411	0.9893	1.0836	1.3971
0.9926	1.1449	2.3504	0.9882	1.1398	1.4653
0.9874	1.3771	2.8347	0.9830	1.3710	1.7672
Qstd slope (m) = 2.07173			Qa slope (m) = 1.29728		
intercept (b) = -0.01761			intercept (b) = -0.01098		
coefficient (r) = 0.99996			coefficient (r) = 0.99996		
y axis = SQRT[H2O(Pa/760) (298/Ta)]			y axis = SQRT[H2O(Ta/Pa)]		

CALCULATIONS

$$Vstd = \text{Diff. Vol} [(Pa - \text{Diff. Hg}) / 760] (298 / Ta)$$

$$Qstd = Vstd / \text{Time}$$

$$Va = \text{Diff Vol} [(Pa - \text{Diff Hg}) / Pa]$$

$$Qa = Va / \text{Time}$$

For subsequent flow rate calculations:

$$Qstd = 1/m \{ [\text{SQRT}(H2O(Pa/760) (298/Ta))] - b \}$$

$$Qa = 1/m \{ [\text{SQRT} H2O(Ta/Pa)] - b \}$$

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong.

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



**TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET**

Project : Environmental Monitoring Works For Contract No. KLN/2015/07				Date of Calibration: 15-Jul-16	
Location : KTD1a				Next Calibration Date: 14-Oct-16	
Brand:	Tisch		Technician: Jimmy Lui		
Model:	TE-5170	S/N:	3478		


CONDITIONS					
Sea Level Pressure (hPa):	1000.7	Corrected Pressure (mm Hg):	751		
Temperature (°C):	30	Temperature (K):	303		

CALIBRATION ORIFICE					
Make:	Tisch	Qstd Slope:	2.07173		
Model:	TE-5025A	Qstd Intercept:	-0.01761		
Calibration Date:	14-Jan-16	Expiry Date:	14-Jan-17		
S/N:	2456				

CALIBRATIONS							
Plate No.	H2O (L) (in)	H2O (R) (in)	H2O (in)	Qstd (m³/min)	I (chart)	IC (corrected)	LINEAR REGRESSION
18	8.00	-3.70	11.700	1.636	63.00	62.11	Slope = 33.8847 Intercept = 6.4726 Corr. coeff.: 0.9995
13	7.00	-2.60	9.600	1.483	57.00	56.19	
10	6.00	-1.20	7.200	1.285	51.00	50.28	
7	4.50	-0.30	4.800	1.051	43.00	42.39	
5	3.30	0.50	2.800	0.805	34.00	33.52	

**Calculations:**

$Qstd = 1/m[\sqrt{(H2O(Pa/Pstd)(Tstd/Ta))}] - b$   
 $IC = I[\sqrt{(Pa/Pstd)(Tstd/Ta)}]$   
 Qstd = standard flow rate  
 IC = corrected chart response  
 I = actual chart response  
 m = calibrator Qstd slope  
 b = calibrator Qstd intercept  
 Ta = actual temperature during calibration (deg K)  
 Pa = actual pressure during calibration (mm Hg)  
 Tstd = 298 deg K  
 Pstd = 760 mm Hg  
**For subsequent calculation of sampler flow:**  
 $1/m((I)[\sqrt{(298/Tav)(Pav/760)}] - b)$   
 m = sampler slope  
 b = sampler intercept  
 I = chart response  
 Tav = daily average temperature  
 Pav = daily average pressure

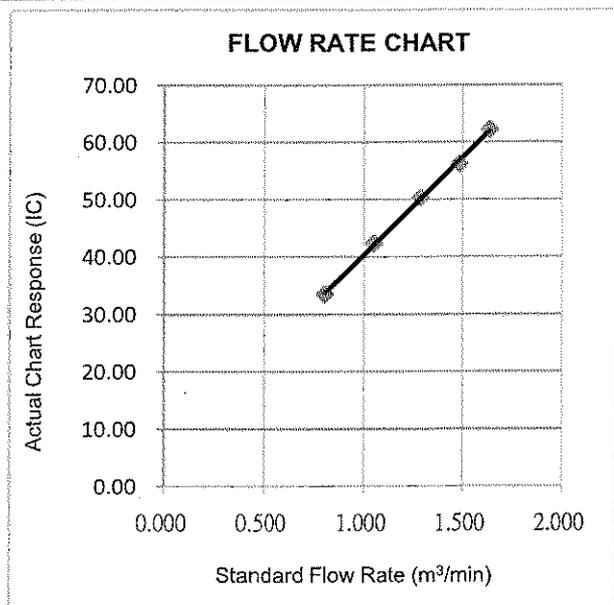

**CHOI KAM HO**  
Project Consultant

**Report Date:** 15<sup>th</sup> July, 2016

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong.

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

## TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Project : Environmental Monitoring Works For Contract No. KLN/2015/07  
Location : KTD2a  
Brand: Tisch  
Model: TE-5170 S/N: 3838  
Date of Calibration: 15-Jul-16  
Next Calibration Date: 14-Oct-16  
Technician: Jimmy Lui

**CONDITIONS**  
Sea Level Pressure (hPa): 1000.7 Corrected Pressure (mm Hg): 751  
Temperature (°C): 30 Temperature (K): 303

**CALIBRATION ORIFICE**  
Make: Tisch Qstd Slope: 2.07173  
Model: TE-5025A Qstd Intercept: -0.01761  
Calibration Date: 14-Jan-16 Expiry Date: 14-Jan-17  
S/N: 2456


CALIBRATIONS							LINEAR REGRESSION	
Plate No.	H2O (L) (in)	H2O (R) (in)	H2O (in)	Qstd (m <sup>3</sup> /min)	I (chart)	IC (corrected)	Slope =	Intercept =
18	6.30	-3.00	9.300	1.460	54.00	53.23	34.5994	2.2156
13	5.80	-2.80	8.600	1.404	51.00	50.28	0.9984	
10	4.30	-1.80	6.100	1.184	44.00	43.38		
7	3.80	0.30	3.500	0.899	33.00	32.53		
5	3.10	0.70	2.400	0.746	29.00	28.59		

**Calculations:**

$Q_{std} = 1/m[\sqrt{(H_2O(P_a/P_{std})(T_{std}/T_a))}] - b$   
 $IC = I[\sqrt{(P_a/P_{std})(T_{std}/T_a)}]$   
 Qstd = standard flow rate  
 IC = corrected chart response  
 I = actual chart response  
 m = calibrator Qstd slope  
 b = calibrator Qstd intercept  
 T<sub>a</sub> = actual temperature during calibration (deg K)  
 P<sub>a</sub> = actual pressure during calibration (mm Hg)  
 T<sub>std</sub> = 298 deg K  
 P<sub>std</sub> = 760 mm Hg

**For subsequent calculation of sampler flow:**

$1/m((I)[\sqrt{(298/T_{av})(P_{av}/760)}] - b)$   
 m = sampler slope  
 b = sampler intercept  
 I = chart response  
 T<sub>av</sub> = daily average temperature  
 P<sub>av</sub> = daily average pressure

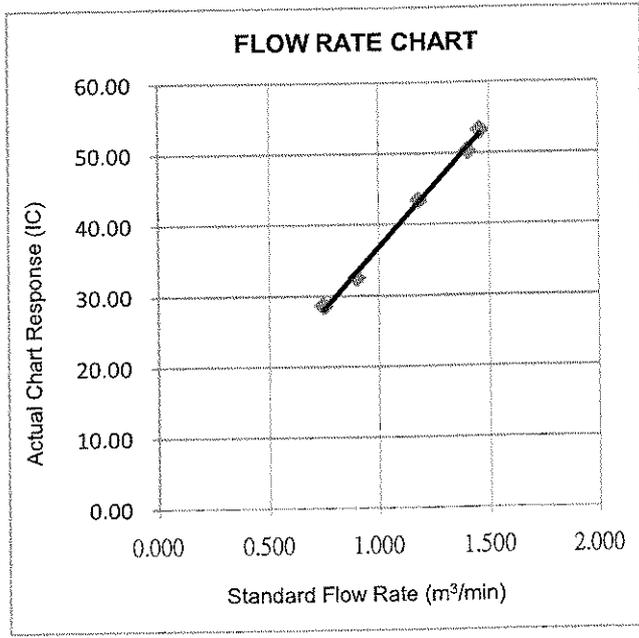

**CHOI KAM HO**  
Project Consultant

**Report Date:** 15<sup>th</sup> July, 2016

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong.

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



**TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET**


Project : Environmental Monitoring Works For Contract No. KLN/2015/07				Date of Calibration: 15-Jul-16	
Location : KER1a				Next Calibration Date: 14-Oct-16	
Brand:	Tisch			Technician: Jimmy Lui	
Model:	TE-5170	S/N:	3482		

CONDITIONS			
Sea Level Pressure (hPa):	1000.7	Corrected Pressure (mm Hg):	751
Temperature (°C):	30	Temperature (K):	303

CALIBRATION ORIFICE			
Make:	Tisch	Qstd Slope:	2.07173
Model:	TE-5025A	Qstd Intercept:	-0.01761
Calibration Date:	14-Jan-16	Expiry Date:	14-Jan-17
S/N:	2456		

CALIBRATIONS							
Plate No.	H2O (L) (in)	H2O (R) (in)	H2O (in)	Qstd (m <sup>3</sup> /min)	I (chart)	IC (corrected)	LINEAR REGRESSION
18	10.00	2.50	7.500	1.312	59.00	58.16	Slope = 33.6133 Intercept = 13.9943 Corr. coeff. 0.9993
13	9.70	2.80	6.900	1.258	57.00	56.19	
10	8.70	4.00	4.700	1.040	50.00	49.29	
7	7.80	5.00	2.800	0.805	41.00	40.42	
5	7.20	5.80	1.400	0.572	34.00	33.52	

**Calculations:**  
 $Qstd = 1/m[\sqrt{(H2O(Pa/Pstd)(Tstd/Ta))}] - b$   
 $IC = I[\sqrt{(Pa/Pstd)(Tstd/Ta)}]$   
 Qstd = standard flow rate  
 IC = corrected chart response  
 I = actual chart response  
 m = calibrator Qstd slope  
 b = calibrator Qstd intercept  
 Ta = actual temperature during calibration (deg K)  
 Pa = actual pressure during calibration (mm Hg)  
 Tstd = 298 deg K  
 Pstd = 760 mm Hg  
**For subsequent calculation of sampler flow:**  
 $1/m((I)[\sqrt{(298/Tav)(Pav/760)}] - b)$   
 m = sampler slope  
 b = sampler intercept  
 I = chart response  
 Tav = daily average temperature  
 Pav = daily average pressure

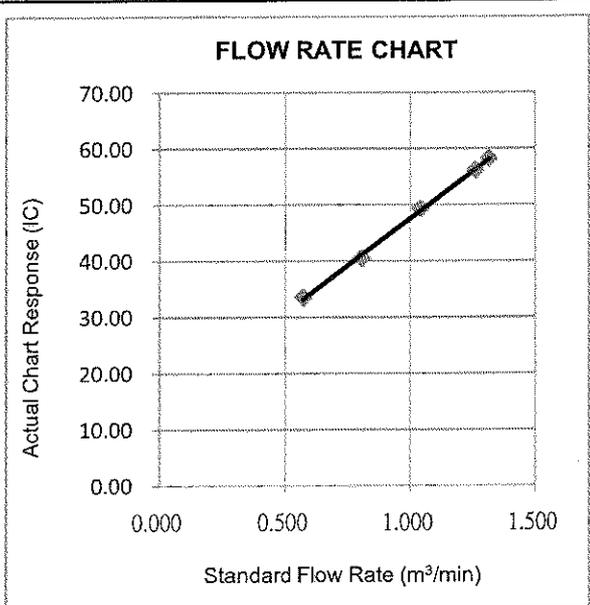

**CHOI KAM HO**  
Project Consultant

**Report Date:** 15<sup>th</sup> July, 2016

# FUGRO TECHNICAL SERVICES LIMITED

Fugro Development Centre,  
5 Lok Yi Street, Tai Lam,  
Tuen Mun, N.T.,  
Hong Kong.

Tel : +852 2450 8233  
Fax : +852 2450 6138  
E-mail : matlab@fugro.com.hk  
Website : www.materialab.com.hk

# Materialab

Report no.: 940891CA160442(1)

Page 1 of 1

## CALIBRATION CERTIFICATE OF SOUND CALIBRATOR

Client : Fugro Technical Services Ltd.

Project : Calibration Services

### Client Supplied Information

Details of Unit Under Test, UUT

Description : Sound Calibrator  
Manufacturer : Casella (Model no. CEL-120/1)  
Serial No. : 5230742  
Next Calibration Date : 02-Mar-2017  
Specification Limit :  $\pm 0.5$ dB

### Laboratory Information

Description : Reference Sound Level Meter  
Equipment ID. : R-119-1  
Date of Calibration : 03-Mar-2016 Ambient Temperature : 21 °C  
Calibration Location : Calibration Laboratory of Materialab  
Method Used : By direct comparison

### Calibration Results :


Parameters (Setting of UUT)	Mean Value (error of measurement)	Specification Limit(dB)
94dB	-0.1 dB	$\pm 0.5$ dB
114dB	-0.3 dB	

### Remarks :

1. The equipment used in this calibration is traceable to recognized National Standards.
2. The mean value is the average of four measurements.
3. The equipment does comply with specification limit.

Checked by :   
CA-R-297 (22/07/2009)

Date : 4.3.2016

Certified by : 

Date : 07 MAR 2016

Kwok Chi Wa (Assistant Manager)

\*\* End of Report \*\*

# FUGRO TECHNICAL SERVICES LIMITED

Fugro Development Centre,  
5 Lok Yi Street, Tai Lam,  
Tuen Mun, N.T.,  
Hong Kong.

Tel : +852 2450 8233  
Fax : +852 2450 6138  
E-mail : matlab@fugro.com  
Website : www.materialab.com

# MaterialLab

Report no.: 161966CA160797

Page 1 of 1

## CALIBRATION CERTIFICATE OF SOUND CALIBRATOR

Client : MaterialLab Consultants Ltd.

Address : Room 723 & 725, 7F., Block B Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Chung, N.T.

Project : Calibration Services

### Client Supplied Information

Details of Unit Under Test, UUT

Description : Sound Calibrator  
Manufacturer : Casella (Model no. CEL-120/1)  
Serial No. : 5230736  
Next Calibration Date : 20-Apr-2017  
Specification Limit :  $\pm 0.5\text{dB}$

### Laboratory Information



Description : Reference Sound Level Meter  
Equipment ID. : R-119-1  
Date of Calibration : 21-Apr-2016 Ambient Temperature : 21 °C  
Calibration Location : Calibration Laboratory of MaterialLab  
Method Used : By direct comparison

### Calibration Results :

Parameters (Setting of UUT)	Mean of Measured value	Specification Limit(dB)
94dB	93.9 dB	$\pm 0.5\text{dB}$
114dB	114.1 dB	

### Remarks :

1. The equipment used in this calibration is traceable to recognized National Standards.
2. The mean value is the average of four measurements.
3. The equipment does comply with specification limit.

Checked by :  Date : 22/4/2016 Certified by :  Date : 22 APR 2016

CA-R-297 (22/07/2009)

Kwok Chi Wa (Assistant Manager)

\*\* End of Report \*\*

Certificate of  
Conformance and Calibration for

**CEL-120 Acoustic Calibrator**

Applicable Standards :- IEC 60942: 2003 & ANSI S1.40: 2006

CEL-120/1 Class 1

CEL-120/2 Class 2

Serial No: 4358251

Firmware: 03

Temperature: 22.0 °C Pressure: 999.5 mb %RH 55.0

Frequency = 1.00kHz ± 2Hz T.H.D. = < 1%	Calibration Level
SPL @ 114.0dB Setting	<u>113.99</u> dB
SPL @ 94.0dB Setting (CEL-120/1 only)	<u>93.93</u> dB/N.A

Engineer :- M. Duncanson Date :- 12 MAY 2016

Company test equipment and acoustic working standards, used for conformance testing, are subject to periodic calibration, traceable to UK national standards, in accordance with the company's ISO9001 Quality System.

**DECLARATION OF CONFORMITY**

This certificate confirms that the instrument specified above has been produced and tested to comply with the manufacturer's published specifications and the relevant European Community CE directives.

Casella CEL ( U.K. ),  
Regent House, Wolsley Road, Kempston, Bedford, MK42 7JY  
Phone: +44 (0) 1234 844100 Fax: +44 (0) 1234 841490  
E-mail: info@casellacel.com  
Web: www.casellameasurement.com

198032A-01

# Certificate of Conformity and Calibration

**Instrument Model:-** CEL-633A  
 Serial Number 3756127  
 Firmware revision V129-09

**Microphone Type:-** CEL-251  
 Serial Number 1231

**Preamplifier Type:-** CEL-495  
 Serial Number 003036

**Instrument Class/Type:-** 1



**Applicable standards:-**

IEC 61672: 2002 / EN 60651 (Electroacoustics - Sound Level Meters)  
 IEC 60651 1979 (Sound Level Meters), ANSI S1.4: 1983 (Specifications For Sound Level Meters)

**Note:-** The test sequences performed in this report are in accordance with the current Sound level meter Standard - IEC61672. The combination of tests performed are considered to confirm the products electro-acoustic performance to all applicable standards including superceeded Sound Level Meter Standards - IEC60651 and IEC60804.

**Test Conditions:-** 25 °C  
 52 %RH  
 1010 mBar

**Test Engineer:-** Millie Duncan  
**Date of Issue:-** February 2, 2016

**Declaration of conformity:-**

This test certificate confirms that the instrument specified above has been successfully tested to comply with the manufacturer's published specifications. Tests are performed using equipment traceable to national standards in accordance with Casella's ISO 9001:2008 quality procedures. This product is certified as being compliant to the requirements of the CE Directive.

**Test Summary:-**


- Self Generated Noise Test
- Electrical Signal Test Of Frequency Weightings
- Frequency & Time Weightings At 1 kHz
- Level Linearity On The Reference Level Range
- Toneburst Response Test
- C-peak Sound Levels
- Overload Indication
- Acoustic Tests

- All Tests Pass

**Combined Electro-Acoustic Frequency Response - A Weighted**

Combined Electro-Acoustic Frequency Response - A Weighted (IEC 61672-3:2006)

The following A-Weighted frequency response graph shows this instruments overall frequency response based upon the application of multi-frequency pressure field calibrations. The microphones Pressure to Free field correction coefficients are applied to pressure response. Reference level taken at 1kHz.

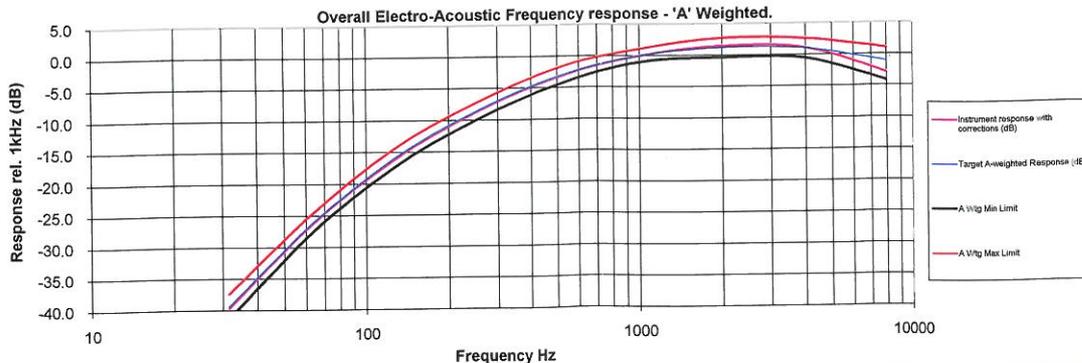

Casella CEL  
 Regen House, Wolsley Road,  
 Kempston, Bedford  
 MK42 7JY  
 Phone: +44(0) 1234 844100  
 Fax: +44(0) 1234 841490  
 E-mail: info@casellameasurement.com  
 Web: www.casellameasurement.com

Casella CEL, Inc. a subsidiary of IDEAL Industries, Inc.  
 415 Lawrence Bell Drive  
 Unit 4  
 Buffalo, NY 14221  
 Toll Free: (800) 366-2966  
 Tel: (603) 672-0031 Fax: (603) 672-8053  
 E-mail: info@casellausa.com  
 Web: www.casellausa.com

# Certificate of Conformity and Calibration

<b>Instrument Model:-</b>	<b>CEL-633A</b>		
Serial Number	3756084		
Firmware revision	V129-09		
<b>Microphone Type:-</b>	<b>CEL-251</b>	<b>Preamplifier Type:-</b>	<b>CEL-495</b>
Serial Number	1257	Serial Number	003538
<b>Instrument Class/Type:-</b>	<b>1</b>		



**Applicable standards:-**

IEC 61672: 2002 / EN 60651 (Electroacoustics - Sound Level Meters)  
 IEC 60651 1979 (Sound Level Meters), ANSI S1.4: 1983 (Specifications For Sound Level Meters)

**Note:-** The test sequences performed in this report are in accordance with the current Sound level meter Standard - IEC61672. The combination of tests performed are considered to confirm the products electro-acoustic performance to all applicable standards including superceded Sound Level Meter Standards - IEC60651 and IEC60804.

<b>Test Conditions:-</b>	25 °C	<b>Test Engineer:-</b>	Millie Duncan
	52 %RH	<b>Date of Issue:-</b>	February 2, 2016
	1010 mBar		

**Declaration of conformity:-**

This test certificate confirms that the instrument specified above has been successfully tested to comply with the manufacturer's published specifications. Tests are performed using equipment traceable to national standards in accordance with Casella's ISO 9001:2008 quality procedures. This product is certified as being compliant to the requirements of the CE Directive.


**Test Summary:-**

Self Generated Noise Test	<b>All Tests Pass</b>
Electrical Signal Test Of Frequency Weightings	<b>All Tests Pass</b>
Frequency & Time Weightings At 1 kHz	<b>All Tests Pass</b>
Level Linearity On The Reference Level Range	<b>All Tests Pass</b>
Toneburst Response Test	<b>All Tests Pass</b>
C-peak Sound Levels	<b>All Tests Pass</b>
Overload Indication	<b>All Tests Pass</b>
Acoustic Tests	<b>All Tests Pass</b>

**Combined Electro-Acoustic Frequency Response - A Weighted**

Combined Electro-Acoustic Frequency Response - A Weighted (IEC 61672-3:2006)

The following A-Weighted frequency response graph shows this instruments overall frequency response based upon the application of multi-frequency pressure field calibrations. The microphones Pressure to Free field correction coefficients are applied to pressure response. Reference level taken at 1kHz.

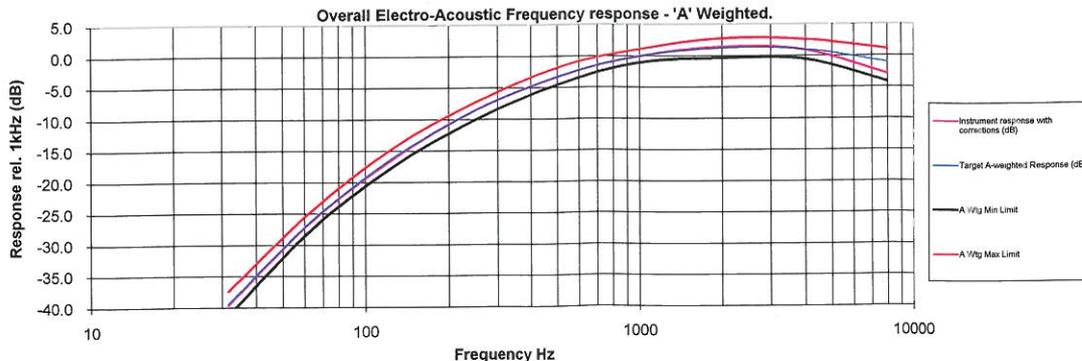

Casella CEL  
 Regen House, Wolseley Road,  
 Kempston, Bedford  
 MK42 7JY  
 Phone: +44(0) 1234 844100  
 Fax: +44(0) 1234 841490  
 E-mail: info@casellameasurement.com  
 Web: www.casellameasurement.com

Casella CEL, Inc. a subsidiary of IDEAL Industries, Inc.  
 415 Lawrence Bell Drive  
 Unit 4  
 Buffalo, NY 14221  
 Toll Free: (800) 366-2966  
 Tel: (603) 672-0031 Fax: (603) 672-8053  
 E-mail: info@casellausa.com  
 Web: www.casellausa.com

# FUGRO TECHNICAL SERVICES LIMITED

Fugro Development Centre,  
5 Lok Yi Street, Tai Lam,  
Tuen Mun, N.T.,  
Hong Kong.

Tel : +852 2450 8233  
Fax : +852 2450 6138  
E-mail : matlab@fugro.com.hk  
Website : www.materialab.com.hk

# Materialab

Report no.: 940891CA152019(1)

Page 1 of 1

## CALIBRATION CERTIFICATE OF SOUND LEVEL METER

Client : Fugro Technical Services Ltd.

Project : Calibration Services

### Client Supplied Information

Details of Unit Under Test, UUT

Description : Sound Level Meter  
Manufacturer : Casella (Model no. CEL-63X(meter), CEL-251(microphone), CEL-495(Preamplifier))  
Serial No. : 3321823 (meter), 2058 (microphone), 001598 (Preamplifier)  
Next Calibration Date : 14-Oct-2016  
Specification Limit : EN 60651: 1994 Type 1

### Laboratory Information


Description : B & K Acoustic Multifunction Calibrator 4226 (Traditional free field setting)  
Equipment ID. : R-108-1  
Date of Calibration : 15-Oct-2015 Ambient Temperature : 20 °C  
Calibration Location : Calibration Laboratory of Materialab  
Method Used : By direct comparison

### Calibration Results :

Parameters		Mean Value (dB)	Specification Limit(dB)
A-weighting frequency response	4000Hz	0.6	2.0 to 0.0
	2000Hz	1.1	2.2 to 0.2
	1000Hz	0.0	1.0 to -1.0
	500Hz	-3.2	-2.2 to -4.2
	250Hz	-8.6	-7.6 to -9.6
	125Hz	-16.0	-15.1 to -17.1
	63Hz	-26.0	-24.7 to -27.7
	31.5Hz	-38.9	-37.9 to -40.9
Differential level linearity	94dB-104dB	0.0	± 0.4
	104dB-114dB	0.1	± 0.4

### Remarks :

1. The equipment used in this calibration is traceable to recognized National Standards.
2. The mean value is the average of four measurements.
3. For calibration: Reference SPL are 94, 104 & 114dB, range setting is 20-140dB & time weighing is fast
4. The equipment does comply with EN 60651: 1994 Type 1 sound level meter for the above measurement.

Checked by :   
CA-R-297 (22/07/2009)

Date : 15/10/2015

Certified by : 

So Chi Kuen (Engineer)

Date : 15 Oct, 2015

\*\* End of Report \*\*

# FUGRO TECHNICAL SERVICES LIMITED

Fugro Development Centre,  
5 Lok Yi Street, Tai Lam,  
Tuen Mun, N.T.,  
Hong Kong.

Tel : +852 2450 8233  
Fax : +852 2450 6138  
E-mail : matlab@fugro.com  
Website : www.materialab.com

# Materialab

Report No. : 161966CA161195

Page 1 of 1

## CALIBRATION CERTIFICATE OF ANEMOMETER

### Client Supplied Information

Client : Materialab Consultants Ltd.

Address: Room 723 & 725, 7/F., Block B Profit Industrial Building, 1-15 Kwai Fung Crescent, Kwai Chung, N.T.

Project : Calibration Services

### Details of Unit Under Test, UUT

Description : Anemometer

Manufacturer : Smart Sensor

Model No. : AR816+

Equipment ID.: MC-A-001

Next Calibration Date : 05-Jun-2017

### Laboratory Information

Details of Reference Equipment –

Description : Reference Anemometer

Equipment ID.: R-101-4

Date of Calibration : 06-Jun-2016 Ambient Temperature : 21 °C

Calibration Location : Calibration Laboratory of Materialab


Method Used : By direct Comparison

### Calibration Results :

Reference Reading (m/s)	UUT Reading (m/s)	Error (m/s)
0.00	0.0	0.00
0.99	1.0	+0.01
2.02	2.0	-0.02
5.00	5.0	0.00
9.98	9.9	-0.08

### Remarks :

1. The equipment being used in this calibration is traceable to recognized National Standards.

Checked by :  Date : 7-6-2016 Certified by :  Date : 7-6-2016  
CA-R-297 (22/07/2009) Chan Chun Wai (Manager)

\*\* End of Report \*\*

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

---

**MaterialLab**

### **Appendix E**

#### **Environmental Monitoring Schedule**

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
 Profit Industrial Building,  
 1-15 Kwai Fung Crescent, Kwai Fong,  
 Hong Kong.

Tel : (852)-24508238  
 Fax : (852)-24508032  
 Email : mcl@fugro.com.hk



**Project: KL/2014/03 - Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway**

**Impact Monitoring Schedule (September 2016)**

Sun	Mon	Tue	Wed	Thur	Fri	Sat
				1 September 2016	2 TSP Monitoring Noise Monitoring	3
4	5	6	7	8 TSP Monitoring Noise Monitoring	9	10
11	12	13	14 TSP Monitoring Noise Monitoring	15	16	17
18	19	20 TSP Monitoring Noise Monitoring	21	22	23	24
25	26 TSP Monitoring Noise Monitoring	27	28	29	30 TSP Monitoring Noise Monitoring	

**Remarks**

1. Monitoring Locations – KTD1a: Centre of Excellence in Paediatric (Children’s Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1a: Site Boundary at Cheung Yip Street
2. TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
3. Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
 Profit Industrial Building,  
 1-15 Kwai Fung Crescent, Kwai Fong,  
 Hong Kong.

Tel : (852)-24508238  
 Fax : (852)-24508032  
 Email : mcl@fugro.com.hk



**Project: KL/2014/03 - Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway**

**Impact Monitoring Schedule (October 2016)**

Sun	Mon	Tue	Wed	Thur	Fri	Sat
						1 October 2016
2	3	4	5	6 TSP Monitoring Noise Monitoring	7	8
9	10	11	12 TSP Monitoring Noise Monitoring	13	14	15
16	17	18 TSP Monitoring Noise Monitoring	19	20	21	22
23	24 TSP Monitoring Noise Monitoring	25	26	27	28	29 TSP Monitoring Noise Monitoring
30	31					

**Remarks**

- Actual monitoring may be subjected to change due to any safety concern or adverse weather condition
- Monitoring Locations – KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1a: Site Boundary at Cheung Yip Street
- TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
- Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong.

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "Material" in a bold, dark blue font and "Lab" in a bold, orange font, both in a sans-serif typeface. The text is set against a white background with a thin orange border.**Project: KL/2014/03 - Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway****Impact Monitoring Schedule (November 2016)**

Sun	Mon	Tue	Wed	Thur	Fri	Sat
		1 November 2016	2	3	4 TSP Monitoring Noise Monitoring	5
6	7	8	9	10 TSP Monitoring Noise Monitoring	11	12
13	14	15	16 TSP Monitoring Noise Monitoring	17	18	19
20	21	22 TSP Monitoring Noise Monitoring	23	24	25	26
27	28 TSP Monitoring Noise Monitoring	29	30			

**Remarks**

1. Actual monitoring may be subjected to change due to any safety concern or adverse weather condition
2. Monitoring Locations – KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1a: Site Boundary at Cheung Yip Street
3. TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
4. Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong.

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



**Project: KL/2014/03 - Kai Tak Development – Stage 3 Infrastructure Works for Developments at the Southern Part of the Former Runway**

**Impact Monitoring Schedule (December 2016)**

Sun	Mon	Tue	Wed	Thur	Fri	Sat
				1 December 2016	2	3 TSP Monitoring Noise Monitoring
4	5	6	7	8	9 TSP Monitoring Noise Monitoring	10
11	12	13	14	15 TSP Monitoring Noise Monitoring	16	17
18	19	20 TSP Monitoring Noise Monitoring	21	22	23	24 TSP Monitoring Noise Monitoring
25	26	27	28	29	30 TSP Monitoring Noise Monitoring	31

**Remarks**

- Actual monitoring may be subjected to change due to any safety concern or adverse weather condition
- Monitoring Locations – KTD1a: Centre of Excellence in Paediatric (Children's Hospital), KTD2a: G/IC Zone next to Kwun Tong Bypass (Future at Site 3C1), KER1a: Site Boundary at Cheung Yip Street
- TSP Monitoring: 24-hours TSP Monitoring per 6 days, and 3 x 1-hour TSP Monitoring per 6 days (as required in case of complaints)
- Noise Monitoring: Leq (30 min) between 0700 and 1900 hours.

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars, one above and one below the text.

### **Appendix F**

#### **Air Quality Monitoring Data**

**24-hour TSP Monitoring Result for  
Kai Tak Development - Stage 3 Infrastructure Works for  
Developments at the Southern Part of the Former Runway**

**KTD1a - Centre of Excellence in Paediatrics (Children's Hospital)**

Start Date	Weather Condition	Air Temperature (K)	Atmospheric Pressure, Pa (mmHg)	Filter Weight (g)		Particulate weight (g)	Sampling Time(hrs)	Flow Rate (m <sup>3</sup> /min.)		Average flow (m <sup>3</sup> /min.)	Total volume (m <sup>3</sup> )	Conc. (ug/m <sup>3</sup> )	Action Level (ug/m <sup>3</sup> )	Limit Level (ug/m <sup>3</sup> )	
				Initial	Final			Initial	Final						
2-Sep-16	Cloudy	301.7	751.6	2.8388	2.9264	0.0876	24	1.03	1.05	1.04	1485.0	59	177	260	
8-Sep-16	Cloudy	301.4	756.1	2.8540	3.0154	0.1614	24	1.16	1.17	1.16	1703.1	95			
14-Sep-16	Sunny	302.6	753.4	2.8364	2.9071	0.0707	24	0.98	0.99	0.98	1007.9	70			
20-Sep-16	Cloudy	298.5	759.1	2.8617	2.9975	0.1358	24	1.05	1.05	1.05	1087.4	125			
26-Sep-16	Cloudy	301.5	755.8	2.7497	2.9244	0.1747	24	0.98	0.99	0.98	1417.6	123			
30-Sep-16	Sunny	298.1	755.8	2.8540	3.1188	0.2648	24	1.57	1.58	1.58	2327.8	114			
												Min	59		
												Max	125		
												Average	98		

**KTD2a - G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1)**

Start Date	Weather Condition	Air Temperature (K)	Atmospheric Pressure, Pa (mmHg)	Filter Weight (g)		Particulate weight (g)	Sampling Time(hrs)	Flow Rate (m <sup>3</sup> /min.)		Average flow (m <sup>3</sup> /min.)	Total volume (m <sup>3</sup> )	Conc. (ug/m <sup>3</sup> )	Action Level (ug/m <sup>3</sup> )	Limit Level (ug/m <sup>3</sup> )	
				Initial	Final			Initial	Final						
2-Sep-16	Cloudy	301.7	751.6	2.8492	2.9122	0.0630	24	1.19	1.27	1.23	1770.0	36	157	260	
8-Sep-16	Cloudy	301.4	756.1	2.8401	2.9096	0.0695	24	1.31	1.32	1.32	1897.3	37			
14-Sep-16	Sunny	302.6	753.4	2.8294	2.9088	0.0794	24	1.08	1.09	1.09	1562.6	51			
20-Sep-16	Cloudy	298.5	759.1	2.8556	3.0042	0.1486	24	1.23	1.27	1.25	1800.1	83			
26-Sep-16	Cloudy	301.5	755.8	2.7370	2.8700	0.1330	24	1.25	1.32	1.29	1855.7	72			
30-Sep-16	Sunny	298.1	755.8	2.8551	2.9804	0.1253	24	1.32	1.32	1.32	1902.6	66			
												Min	36		
												Max	83		
												Average	57		




**KER1a - Site Boundary at Cheung Yip Street**

Start Date	Weather Condition	Air Temperature (K)	Atmospheric Pressure, Pa (mmHg)	Filter Weight (g)		Particulate weight (g)	Sampling Time(hrs)	Flow Rate (m <sup>3</sup> /min.)		Average flow (m <sup>3</sup> /min.)	Total volume (m <sup>3</sup> )	Conc. (ug/m <sup>3</sup> )	Action Level (ug/m <sup>3</sup> )	Limit Level (ug/m <sup>3</sup> )	
				Initial	Final			Initial	Final						
2-Sep-16	Cloudy	301.7	751.6	2.8331	2.9145	0.0814	24	0.91	0.92	0.91	1292.4	63	172	260	
8-Sep-16	Cloudy	301.4	756.1	2.8584	2.9793	0.1209	24	0.91	0.92	0.92	1300.6	93			
14-Sep-16	Sunny	302.6	753.4	2.8542	3.1091	0.2549	24	1.20	1.22	1.21	1734.6	147			
20-Sep-16	Cloudy	298.5	759.1	2.8472	3.0709	0.2237	24	1.07	1.07	1.07	1550.6	144			
26-Sep-16	Cloudy	301.5	755.8	2.8305	3.1270	0.2965	24	1.35	1.37	1.36	2031.8	146			
30-Sep-16	Sunny	298.1	755.8	2.8620	3.1586	0.2966	24	1.36	1.37	1.37	2043.3	145			
												Min	63		
												Max	147		
												Average	123		

Note:

Underline: Exceedance of Action Level

Underline and Bold: Exceedance of Limit Level

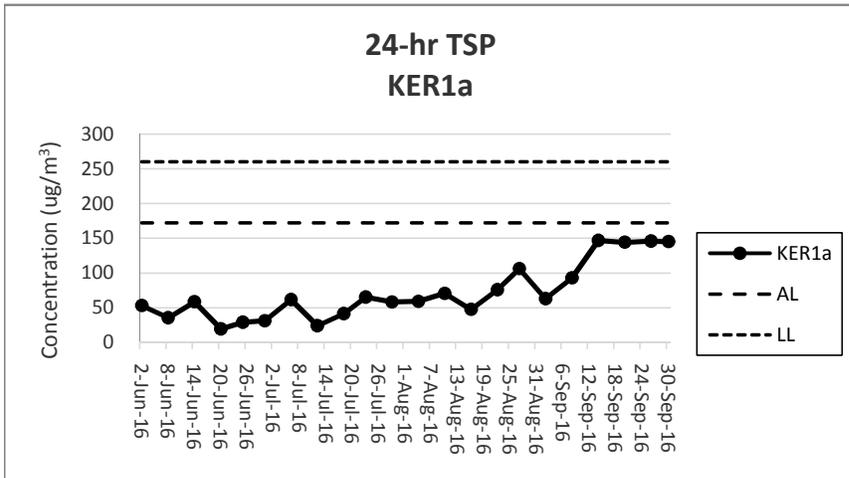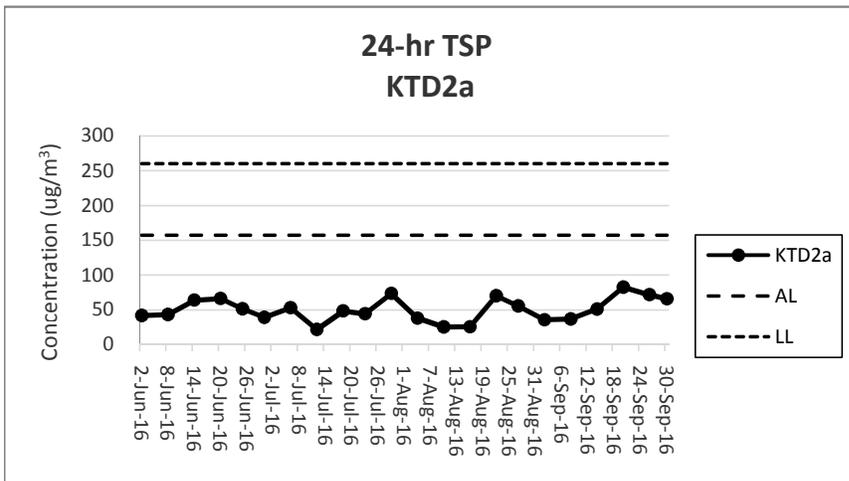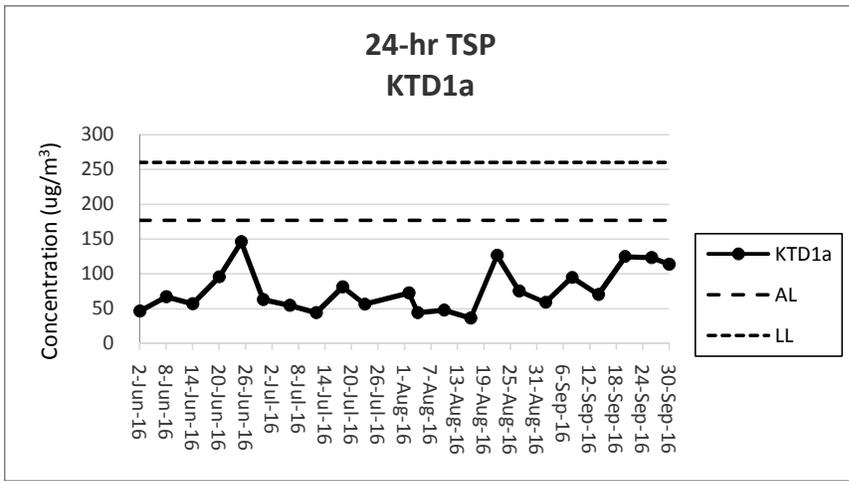

Note:

- 1) The major activities being carried out on site during the reporting period can be referred to Section 1.3.2.
- 2) The weather conditions during the reporting period can be referred to Appendix K.
- 3) Any other factors which might affect the monitoring results can be referred to Section 2.6.4.
- 4) QA/QC results, calibration results and detection limits can be referred to Appendix D.
- 5) The 24-hr TSP monitoring at KTD 1a on 29 July 2016 was postponed due to the insufficient power supply and rescheduled to 2 August 2016.

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, sans-serif font. The text is white and is set against a black rectangular background that has a thin white border.

### **Appendix G**

#### **Noise Monitoring Data**

**Noise Impact Monitoring Result for  
Kai Tak Development - Stage 3 Infrastructure Works for  
Developments at the Southern Part of the Former Runway**

**KTD 1a: Centre of Excellence in Paediatrics (Children's Hospital)**

Date	Start Time	Leq 30min dB(A)	L10 dB(A)	L90 dB(A)	Wind Speed (m/s)	Weather
2-Sep-16	11:21	71	73	65	1.6	Cloudy
8-Sep-16	13:11	71	74	63	0.9	Cloudy
14-Sep-16	11:02	72	75	68	0.5	Sunny
20-Sep-16	10:59	71	73	68	0.4	Cloudy
26-Sep-16	11:36	69	70	67	0.8	Cloudy
30-Sep-16	11:11	68	70	63	0.6	Sunny
	<b>Max</b>	72				
	<b>Min</b>	68				
	<b>Limit Level</b>	<b>75</b>				

**KTD 2a: G/IC Zone next to Kwun Tong Bypass (Future Hospital at Site 3C1)**

Date	Start Time	Leq 30min dB(A)	L10 dB(A)	L90 dB(A)	Wind Speed (m/s)	Weather
2-Sep-16	10:38	62	63	59	1.6	Cloudy
8-Sep-16	10:26	61	63	58	1.3	Cloudy
14-Sep-16	11:37	62	63	59	0.9	Sunny
20-Sep-16	13:04	64	67	61	2.2	Cloudy
26-Sep-16	10:52	62	63	59	1.4	Cloudy
30-Sep-16	10:28	61	63	58	0.8	Sunny
	<b>Max</b>	64				
	<b>Min</b>	61				
	<b>Limit Level</b>	<b>75</b>				

**KER 1a: Site Boundary at Cheung Yip Street**




Date	Start Time	Leq 30min dB(A)	L10 dB(A)	L90 dB(A)	Wind Speed (m/s)	Weather
2-Sep-16	12:01	69	72	64	1.6	Cloudy
8-Sep-16	11:21	70	72	65	0.7	Cloudy
14-Sep-16	14:15	69	72	63	1.1	Sunny
20-Sep-16	10:22	69	71	65	1.5	Cloudy
26-Sep-16	13:04	69	71	66	1.1	Cloudy
30-Sep-16	9:47	68	70	65	0.6	Sunny
	<b>Max</b>	70				
	<b>Min</b>	68				
	<b>Limit Level</b>	<b>75</b>				

Note:

KTD1a: Façade Measurement

KTD2a & KER1a: Free-field measurement (+3dB(A) correction has been applied)

No raining or wind with speed over 5 m/s was observed during noise monitoring according to the onsite observation.

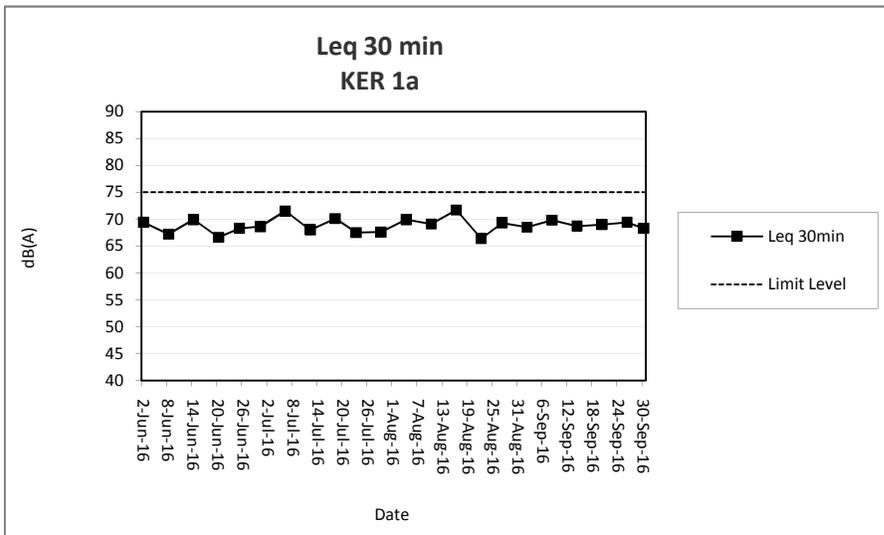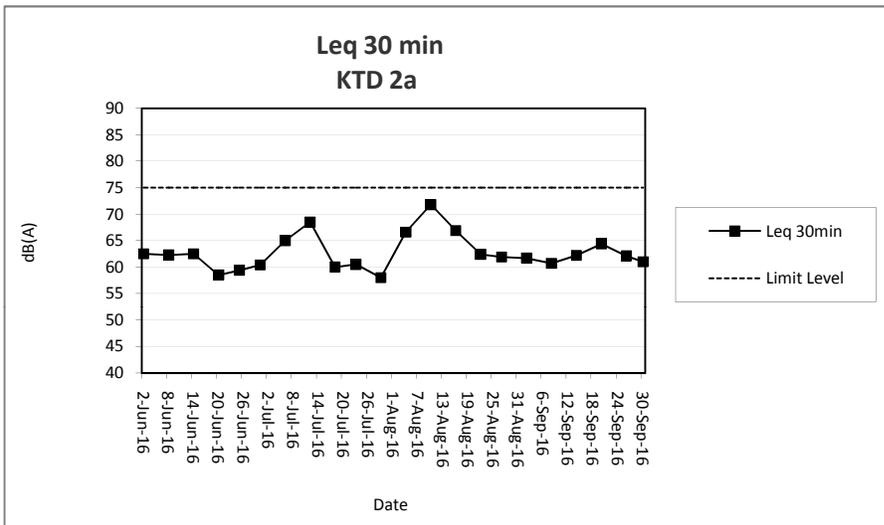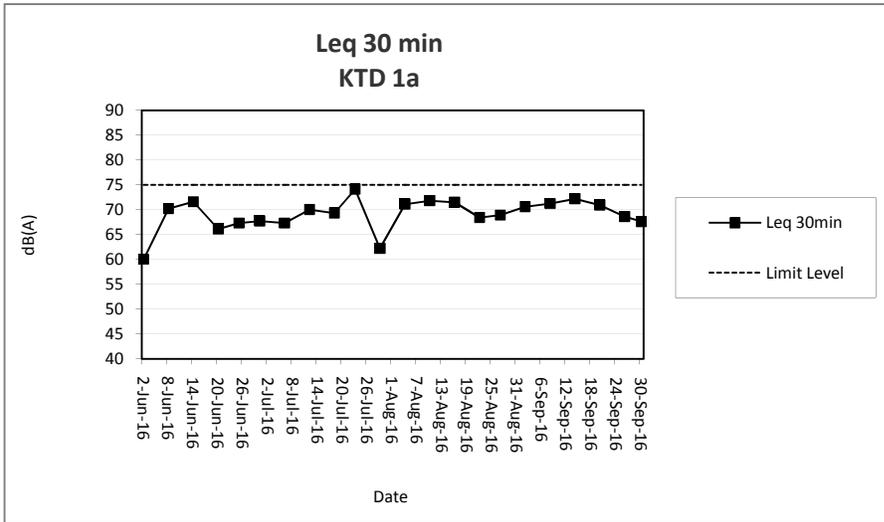

Note:

- 1) The major activities being carried out on site during the reporting period can be referred to Section 1.3.2.
- 2) The weather conditions during the reporting period can be referred to Appendix K.
- 3) Any other factors which might affect the monitoring results can be referred to Section 3.7.2.
- 4) QA/QC results, calibration results and detection limits can be referred to Appendix D.

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, sans-serif font. The text is white and is set against a black rectangular background that has horizontal bars extending to the left and right, creating a stylized, framed effect.

### **Appendix H**

#### **Events and Action Plan**

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



## Event and Action Plan for Construction Dust Monitoring

EVENT	ACTION			
	ET	IEC	ER	Contractor
<b>Action Level</b>				
Exceedance for one sample.	<ol style="list-style-type: none"> <li>1. Identify sources, investigate the causes of complaint and propose remedial measures.</li> <li>2. Inform IEC and ER.</li> <li>3. Repeat measurement to confirm finding;.</li> <li>4. Increase monitoring frequency</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET.</li> <li>2. Check the Contractor's working methods.</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor.</li> </ol>	<ol style="list-style-type: none"> <li>1. Rectify any unacceptable practices.</li> <li>2. Amend working methods agreed with the ER as appropriate.</li> </ol>
Exceedance for two or more consecutive samples.	<ol style="list-style-type: none"> <li>1. Identify sources.</li> <li>2. Inform the IEC and ER.</li> <li>3. Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>4. Repeat measurements to confirm findings.</li> <li>5. Increase monitoring frequency to daily.</li> <li>6. Discuss with the IEC, ER and Contractor on remedial action required.</li> <li>7. If exceedance continues, arrange meeting with the IEC, Contractor and ER.</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET.</li> <li>2. Check the Contractor's working methods.</li> <li>3. Discuss with the ET, ER and Contractor on possible remedial measures if required.</li> <li>4. Advise the ER on the effectiveness of proposed remedial measures if required.</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor.</li> <li>2. Ensure remedial measures properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit proposals for remedial action to the ER within 3 working days of notification.</li> <li>2. Implement the agreed proposals.</li> <li>3. Amend proposal as appropriate</li> </ol>
<b>Limit Level</b>				
Exceedance for one sample.	<ol style="list-style-type: none"> <li>1. Identify sources, investigate causes of exceedance and proposed remedial measures.</li> <li>2. Inform the IEC, ER, and Contractor.</li> <li>3. Repeat measurement to confirm finding.</li> <li>4. 4. Increase monitoring frequency to daily.</li> <li>5. Assess effectiveness of the Contractor's remedial action and keep the IEC and ER informed of the results</li> </ol>	<ol style="list-style-type: none"> <li>1. Check monitoring data submitted by the ET.</li> <li>2. Check the Contractor's working methods.</li> <li>3. Discuss with the ET, ER and Contractor on possible remedial measures.</li> <li>4. Advise the ER and ET on the effectiveness of the proposed remedial measures.</li> <li>5. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of the notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial action to the ER and copy to the ET and IEC within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Amend proposal as appropriate.</li> </ol>
Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> <li>1. Notify the IEC, ER and Contractor.</li> <li>2. Identify sources.</li> <li>3. Repeat measurements to confirm findings.</li> <li>4. Increase monitoring frequency to daily.</li> <li>5. Carry out analysis of the Contractor's working procedures with the ER to determine the possible mitigation to be implemented.</li> <li>6. Arrange meeting with the IEC and ER to</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst the ER, ET and Contractor on the potential remedial action.</li> <li>2. Review the Contractor's remedial action whenever necessary to assure their effectiveness and advise the ER and ET accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of the notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. In consultation with the IEC and ET, agree with the Contractor on the remedial measures to be implemented.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial action to the ER and copy to the IEC and ET within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Resubmit proposals if problems still not under control.</li> <li>5. Stop the relevant portion of works as</li> </ol>

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars.

EVENT	ACTION			
	ET	IEC	ER	Contractor
	<p>discuss the remedial action to be taken.</p> <p>7. Assess the effectiveness of the Contractor's remedial action and keep the IEC, EPD and ER informed of the results.</p> <p>8. If exceedance stops, cease additional monitoring</p>		<p>continues, consider what portion of works is responsible and instruct the Contractor to stop that portion of works until the exceedance is abated.</p>	<p>determined by the ER until the exceedance is abated.</p>

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk



## Event and Action Plan for Noise Impact

EVENT	ACTION			
	ET	IEC	ER	Contractor
Action Level	<ol style="list-style-type: none"> <li>1. Notify the IEC, ER and Contractor.</li> <li>2. Carry out investigation.</li> <li>3. Report the results of investigation to the IEC and Contractor.</li> <li>4. Discuss jointly with the ER and Contractor and formulate remedial measures.</li> <li>5. Increase the monitoring frequency to check the mitigation effectiveness</li> </ol>	<ol style="list-style-type: none"> <li>1. Review the monitoring data submitted by the ET.</li> <li>2. Review the construction methods and proposed remedial measures by the Contractor, and advise the ET and ER if the proposed remedial measures would be sufficient</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor.</li> <li>2. Require the Contractor to propose remedial measures for implementation if required.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to the ER and copy to the IEC and ET.</li> <li>2. Implement noise mitigation proposals.</li> </ol>
Limit Level	<ol style="list-style-type: none"> <li>1. Notify the IEC, ER and Contractor.</li> <li>2. Identify sources.</li> <li>3. Repeat measurements to confirm findings.</li> <li>4. Carry out analysis of the Contractor's working procedures with the ER and Contractor to determine possible mitigations to be implemented.</li> <li>5. Record the causes and action taken for the exceedances.</li> <li>6. Increase the monitoring frequency.</li> <li>7. Assess the effectiveness of the Contractor's remedial action with the ER and keep the IEC informed of the results.</li> <li>8. If exceedance stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst the ER, ET and Contractor on the potential remedial action.</li> <li>2. Review the Contractor's remedial action whenever necessary to assure their effectiveness and advise the ER accordingly.</li> <li>3. Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of exceedance in writing.</li> <li>2. Notify the Contractor.</li> <li>3. Require the Contractor to propose remedial measures for the analysed noise problems.</li> <li>4. Ensure remedial measures are properly implemented.</li> <li>5. If exceedance continues, consider what portion of work is responsible and instruct the Contractor to stop that portion of works until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance.</li> <li>2. Submit proposals for remedial action to the ER and copy to the ET and IEC within 3 working days of notification.</li> <li>3. Implement the agreed proposals.</li> <li>4. Resubmit proposals if problems still not under control.</li> <li>5. Stop the relevant portion of works as determined by the ER until the exceedance is abated.</li> </ol>

# MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk



## Event and Action Plan for Landscape and Visual Impact

EVENT	ACTION			
	ET	IEC	ER	Contractor
Non-conformity on one occasion	<ol style="list-style-type: none"><li>1. Identify Source</li><li>2. Inform the IEC and the ER</li><li>3. Discuss remedial actions with the IEC, the ER and the Contractor</li><li>4. Monitor remedial actions until rectification has been completed</li></ol>	<ol style="list-style-type: none"><li>1. Check report</li><li>2. Check the Contractor's working method</li><li>3. Discuss with the ET and the Contractor on possible remedial measures</li><li>4. Advise the ER on effectiveness of proposed remedial measures.</li><li>5. Check implementation of remedial measures.</li></ol>	<ol style="list-style-type: none"><li>1. Notify Contractor</li><li>2. Ensure remedial measures are properly implemented</li></ol>	<ol style="list-style-type: none"><li>1. Amend working methods</li><li>2. Rectify damage and undertake any necessary replacement</li></ol>
Repeated Non-conformity	<ol style="list-style-type: none"><li>1. Identify Source</li><li>2. Inform the IEC and the ER</li><li>3. Increase monitoring frequency</li><li>4. Discuss remedial actions with the IEC, the ER and the Contractor</li><li>5. Monitor remedial actions until rectification has been completed</li><li>6. If exceedance stops, cease additional monitoring</li></ol>	<ol style="list-style-type: none"><li>1. Check monitoring report</li><li>2. Check the Contractor's working method</li><li>3. Discuss with the ET and the Contractor on possible remedial measures</li><li>4. Advise the ER on effectiveness of proposed remedial measures</li><li>5. Supervise implementation of remedial measures.</li></ol>	<ol style="list-style-type: none"><li>1. Notify the Contractor</li><li>2. Ensure remedial measures are properly implemented</li></ol>	<ol style="list-style-type: none"><li>1. Amend working methods</li><li>2. Rectify damage and undertake any necessary replacement</li></ol>

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars.

### **Appendix I**

#### **Waste Flow Table**

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

# MaterialLab

Monthly Ending	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of Non-inert C&D Wastes Generated Monthly				
	Total Quantity Generated (Inert C&D)	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 2)	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m <sup>3</sup> )
2016 Jan	0.159	0.101	0.058	Nil	Nil	Nil	Nil	0.023	0.00002	0.0158	0.0335
2016 Feb	0.291	0.050	0.241	Nil	Nil	Nil	1.34	0.023	0.00002	0.0158	0.0335
2016 Mar	2.7389	0.0407	0.0662	Nil	2.632	Nil	5.92	0.023	0.00002	0.0158	0.0571
2016 Apr	4.1718	0.0578	0.462	Nil	3.652	Nil	12.5	0.023	0.00002	0.0158	0.0426
2016 May	3.592	Nil	0.299	Nil	3.293	Nil	5.23	0.023	0.00002	0.0158	0.0621
2016 June	4.6035	Nil	0.8555	Nil	3.748	Nil	Nil	0.023	0.00002	0.0158	0.0619
2016 July	6.155	0.153	0.015	Nil	5.987	Nil	7.84	0.023	0.00002	0.0158	0.0433
2016 Aug	10.231	Nil	Nil	Nil	10.231	Nil	19.93	0.023	Nil	Nil	0.0250
2016 Sept	7.2267	Nil	Nil	Nil	7.2267	Nil	33.65	0.023	Nil	Nil	0.0103
2016 Oct											
2016 Nov											
2016 Dec											
<b>Total</b>	<b>39.1689</b>	<b>0.4025</b>	<b>2.00</b>	<b>Nil</b>	<b>36.7697</b>	<b>Nil</b>	<b>86.41</b>	<b>0.207</b>	<b>0.00014</b>	<b>0.1106</b>	<b>0.3687</b>

Note:

- 1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- 2) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging materials.

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, sans-serif font. The text is white and is set against a black rectangular background that has horizontal bars extending to the left and right, creating a stylized, framed effect.

### **Appendix J**

#### **Environmental Mitigation Implementation Schedule (EMIS)**

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
<u>Air Quality Measures</u>					
New Distributor Roads Serving the Planned KTD					
AEIAR-130/2009 S3.2	AEIAR 130/2009 EM&A Manual S2.2	8 times daily watering of the work site with active dust emitting activities.	Contractor	All relevant worksites	Implemented
Decommissioning of the Radar Station of the former Kai Tak Airport					
AEIAR-130/2009 S5.2.19	AEIAR 130/2009 EM&A Manual S4.2.4	The excavation area should be limited to as small in size as possible and backfilled with clean and/or treated soil shortly after excavation work.  The exposed excavated area should be covered by the tarpaulin during night time.  The top layer soils should be sprayed with fine misting of water immediately before the excavation.	Contractor	All relevant worksites	Not Applicable
Trunk Road T2					
AEIAR-174/2013 S4.9.2.1	AEIAR-174/2013 EM&A Manual S2.3.1.1	Watering of the construction areas 12 times per day to reduce dust emissions by 91.7%, with reference to the "Control of Open Fugitive Dust Sources" (USEPA AP-42). The amount of water to be applied would be 0.91L/m <sup>2</sup> for the respective watering frequency.	Contractor	All relevant worksites	Implemented
		Dust enclosures with watering would be provided along the loading ramps and conveyor belts for unloading the C&D materials to the barge for dust suppression.	Contractor	All relevant worksites	Not Applicable
		8 km per hour is the recommended limit of the speed for vehicles on unpaved site roads.	Contractor	All relevant worksites	Implemented
<u>Good Site Practices</u>					
AEIAR-130/2009	AEIAR 130/2009	Stockpiling site(s) should be lined with impermeable sheeting and bunded. Stockpiles should	Contractor	All relevant	Partially

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
S3.2, S5.2.19, AEIAR-174/2013 S4.9.2.2	EM&A Manual S2.2, S4.2, AEIAR 174/2013 EM&A Manual S2.3.1.2	be fully covered by impermeable sheeting to reduce dust emission.		worksites	Implemented
		Use of regular watering to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather. Use of frequent watering for particularly dusty construction areas and areas close to ASRs.	Contractor	All relevant worksites	Implemented
		Misting for the dusty material should be carried out before being loaded into the vehicle. Any vehicle with an open load carrying area should have properly fitted side and tail boards.	Contractor	All relevant worksites	Implemented
		Material having the potential to create dust should not be loaded from a level higher than the side and tail boards and should be dampened and covered by a clean tarpaulin.	Contractor	All relevant worksites	Implemented
		Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations; The tarpaulin should be properly secured and should extent at least 300 mm over the edges of the sides and tailboards. The material should also be dampened if necessary before transportation.	Contractor	All relevant worksites	Implemented
		The vehicles should be restricted to maximum speed of 10 km per hour. Confined haulage and delivery vehicle to designated roadways insider the site. Onsite unpaved roads should be compacted and kept free of lose materials.	Contractor	All relevant worksites	Implemented
		Vehicle washing facilities should be provided at every vehicle exit point. Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving the construction sites.	Contractor	All relevant worksites	Implemented
		The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores.			
		Every main haul road should be scaled with concrete and kept clear of dusty materials or sprayed with water so as to maintain the entire road surface wet.	Contractor	All relevant worksites	Implemented
Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides.	Contractor	All relevant worksites	Implemented		

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed.	Contractor	All relevant worksites	Implemented
		Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system.	Contractor	All relevant worksites	Implemented
		Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines.	Contractor	All relevant worksites	Partially Implemented
		Open stockpiles shall be avoided or covered. Prevent placing dusty material storage piles near ASRs.	Contractor	All relevant worksites	Partially Implemented
		Routing of vehicles and position of construction plant should be at the maximum possible distance from ASRs.	Contractor	All relevant worksites	Not Applicable
		<u>Dark smoke</u>			
		Dark smoke emission shall be control in accordance with the Air Pollution Control (Smoke) Regulation and ETWB TCW 19/2005.	Contractor	All relevant worksites	Implemented
		Plant and equipment should be well maintained to prevent dark smoke emission.	Contractor	All relevant worksites	Implemented
<u>Noise Measures</u>					
Trunk Road T2					
AEIAR-174/2013 S5.9.2.1	AEIAR-174/2013 EM&A Manual S3.4.1.1	The use of quieter plant, including Quality Powered Mechanical Equipment (QPME) is specified for the list of equipment: <ul style="list-style-type: none"> <li>• Concrete lorry mixer</li> <li>• Dump Truck, 5.5 tonne &lt; gross vehicle weight &lt;= 38 tonne</li> <li>• Generator, Super Silenced, 70 dB(A) at 7m</li> </ul>	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		<ul style="list-style-type: none"> <li>• Poker, vibratory, Hand-held (electric)</li> <li>• Water Pump, Submersible (Electric)</li> <li>• Mobile Crane - KOBELCO CKS900</li> <li>• Excavator, wheeled/tracked - HYUNDAI R80CR-9</li> </ul>			
		Use of temporary or fixed noise barriers with a surface density of at least 10kg/m <sup>2</sup> to screen noise from movable and stationary plant.	Contractor	All relevant worksites	Not Applicable
		Use of enclosures with covers at top and three sides and a surface density of at least 10kg/m <sup>2</sup> to screen noise from generally static noisy plant such as air compressors.	Contractor	All relevant worksites	Not Applicable
		Use of acoustic fabric for the silent piling system, drill rigs, rock drills etc.	Contractor	All relevant worksites	Implemented
		<u>Good Site Practices</u>			
AEIAR-130/2009 S3.3, S5.3.10, AEIAR-174/2013 S5.9.2.1	AEIAR 130/2009 EM&A Manual S2.3, S4.3.2, AEIAR-174/2013 EM&A Manual S3.4.1.1	Only well-maintained plant should be operated on-site and plant shall be serviced regularly during the construction/ decommissioning program.	Contractor	All relevant worksites	Implemented
		Silencers or mufflers on construction equipment should be utilized and shall be properly maintained during the construction/ decommissioning program.	Contractor	All relevant worksites	Not Applicable
		Mobile plant, if any, should be sited as far away from NSRs as possible.	Contractor	All relevant worksites	Implemented
		Machines and plant (such as trucks) that may be in intermittent use shall be shut down between works periods or should be throttled down to a minimum.	Contractor	All relevant worksites	Implemented
		Plant known to emit noise strongly in one direction shall, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.	Contractor	All relevant worksites	Implemented
		Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction/ decommissioning activities.	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		Use of site hoarding as a noise barrier to screen noise at low level NSRs.	Contractor	All relevant worksites	Implemented
		For the use of hand held percussive breakers (with mass of above 10kg) and portable air compressors (supply air at 500 kPa or above), the noise level of such PME shall comply with a stringent noise emission standard and a noise emission label shall be obtained from the DEP before use at any time in construction site.	Contractor	All relevant worksites	Implemented
		Quiet powered mechanical equipment (PME) shall be used for the construction of the Project.	Contractor	All relevant worksites	Implemented
		Full enclosures shall be used to screen noise from relatively static PMEs (including air compressor, bar bender, concrete pump, generator and water pump) from sensitive receiver(s).	Contractor	All relevant worksites	Not Applicable
		Movable cantilevered noise barriers shall be used to screen noise from mobile PMEs (including asphalt paver, breaker, excavator and hand-held breaker) from sensitive receiver(s). These movable cantilevered noise barriers shall be located close to the mobile PMEs and shall be moved/adjusted iteratively in step with each movement of the corresponding mobile PMEs in order to maximize their noise reduction effects.	Contractor	All relevant worksites	Not Applicable
		Only approved or exempted Non-road Mobile Machineries (NRMMS) including regulated machines and non-road vehicles with proper labels are allowed to be used in specified activities on-site.	Contractor	All relevant worksites	Implemented
<b>Water Quality Measures</b>					
Trunk Road T2					
		<u>Accidental Spillage</u>			
AEIAR-174/2013 S6.4.8.5	AEIAR-174/2013 EM&A Manual S4.2.1.1	All bentonite slurry should be stored in a container that resistant to corrosion, maintained in good conditions and securely closed; The container should be labelled in English and Chinese and note that the container is for storage of bentonite slurry only.	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		The storage container should be placed on an area of impermeable flooring and bunded with capacity to accommodate 110% of the volume of the container size or 20% by volume stored in the area and enclosed with at least 3 sides.	Contractor	All relevant worksites	Implemented
		The storage container should be sufficiently covered to prevent rainfall entering the container or bunded area (water collected within the bund must be tested and disposed of as chemical waste, if necessary). An emergency clean up kit shall be readily available where bentonite fluid will be stored or used.	Contractor	All relevant worksites	Implemented
		The handling and disposal of bentonite slurries should be undertaken in accordance with ProPECC PN 1/94. Surplus bentonite slurries used in construction works shall be reconditioned and reused wherever practicable. Residual bentonite slurry shall be disposed of from the site as soon as possible as stipulated in Clause 8.56 of the General Specification for Civil Engineering Works. The Contractor should explore alternative disposal outlets for the residual bentonite slurry (dewatered bentonite slurry to be disposed to a public filling area and liquid bentonite slurry, if mixed with inert fill material, to be disposed to a public filling area) and disposal at landfill should be the last resort.	Contractor	All relevant worksites	Implemented
AEIAR-174/2013 S6.4.8.8	AEIAR-174/2013 EM&A Manual S4.2.1.1	In order to protect against impacts to the surrounding marine waters of the KTTS and Victoria Harbour in the event of an accidental spillage of fuel or oil, the Contractor will be required to prepare a spill response plan to the satisfaction of AFCD, EPD, FSD, Police, TD and WSD to define procedures for the control, containment and clean-up of any spillage that could occur on the construction site.	Contractor	All relevant worksites	Implemented
		<u>Dredging, Reclamation and Filling</u>			
		No dredging, reclamation or filling in the marine environment shall be carried out.	Contractor	All relevant worksites	Implemented
Decommissioning of the Radar Station of the former Kai Tak Airport					
		<u>Building Demolition</u>			

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
AEIAR-130/2009 S5.4	AEIAR 130/2009 EM&A Manual S4.4	The site practices outlined in ProPECC PN 1/94 "Construction Site Drainage" should be followed as far as practicable in order to minimise surface runoff and the chance of erosion.	Contractor	All relevant worksites	Not Applicable
		There is a need to apply to EPD for a discharge licence under the WPCO for discharging effluent from the construction site. The discharge quality is required to meet the requirements specified in the discharge licence. All the runoff, wastewater or extracted groundwater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. It is anticipated that the wastewater generated from the works areas would be of small quantity. Monitoring of the treated effluent quality from the works areas should be carried out in accordance with the WPCO license which is under the ambit of regional office (RO) of EPD.	Contractor	All relevant worksites	Implemented
		<u>General Construction Works</u>			
		<u>Construction Runoff</u>			
AEIAR-130/2009 S3.4, S5.4/ AEIAR-174/2013 S6.4.8.1	AEIAR 130/2009 EM&A Manual S2.4, S4.4/ AEIAR-174/2013 EM&A Manual S4.2.1.1	Exposed soil areas should be minimised to reduce the potential for increased siltation, contamination of runoff, and erosion. Construction runoff related impacts associated with the above ground construction activities can be readily controlled through the use of appropriate mitigation measures which include the use of sediment traps and adequate maintenance of drainage systems to prevent flooding and overflow.	Contractor	All relevant worksites	Implemented
		Construction site should be provided with adequately designed perimeter channel and pre-treatment facilities and proper maintenance. The boundaries of critical areas of earthworks should be marked and surrounded by dykes or embankments for flood protection. Temporary ditches should be provided to facilitate runoff discharge into the appropriate watercourses, via a silt retention pond. Permanent drainage channels should incorporate sediment basins or traps and baffles to enhance deposition rates. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94.	Contractor	All relevant worksites	Implemented
		Ideally, construction works should be programmed to minimise surface excavation works during the rainy season (April to September). All exposed earth areas should be completed as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. If excavation of soil cannot be avoided during the	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		rainy season, or at any time of year when rainstorms are likely, exposed slope surfaces should be covered by tarpaulin or other means.			
		Sediment tanks of sufficient capacity, constructed from pre-formed individual cells of approximately 6 to 8 m <sup>3</sup> capacity, are recommended as a general mitigation measure which can be used for settling surface runoff prior to disposal. The system capacity is flexible and able to handle multiple inputs from a variety of sources and particularly suited to applications where the influent is pumped.	Contractor	All relevant worksites	Implemented
		Open stockpiles of construction materials (for examples, aggregates, sand and fill material) of more than 50 m <sup>3</sup> should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system.	Contractor	All relevant worksites	Partially Implemented
		Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers.	Contractor	All relevant worksites	Implemented
		Precautions to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events.	Contractor	All relevant worksites	Not Applicable
		Oil interceptors should be provided in the drainage system and regularly cleaned to prevent the release of oils and grease into the storm water drainage system after accidental spillages. The interceptor should have a bypass to prevent flushing during periods of heavy rain.	Contractor	All relevant worksites	Not Applicable
		An adequately designed and located wheel washing bay should be provided at every site exit, and wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains.	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase
					Implementation Status
		<u>Drainage</u>			
		It is recommended that on-site drainage system should be installed prior to the commencement of other construction activities. Sediment traps should be installed in order to minimise the sediment loading of the effluent prior to discharge into foul sewers. There should be no direct discharge of effluent from the site into the sea.	Contractor	All relevant worksites	Implemented
		All temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge should be adequately designed for the controlled release of storm flows. All sediment control measures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rain storms. The temporarily diverted drainage should be reinstated to its original condition when the construction work has finished or the temporary diversion is no longer required.	Contractor	All relevant worksites	Implemented
		<u>Stormwater Discharges</u>			
		Minimum distances of 100 m should be maintained between the existing or planned stormwater discharges and the existing or planned seawater intakes.	Contractor	All relevant worksites	Not Applicable
		<u>Sewage Effluent</u>			
		Construction work force sewage discharges on site are expected to be connected to the existing trunk sewer or sewage treatment facilities. The construction sewage may need to be handled by portable chemical toilets prior to the commission of the on-site sewer system. Appropriate numbers of portable toilets should be provided by a licensed contractor to serve the large number of construction workers over the construction site. The Contractor should also be responsible for waste disposal and maintenance practices.	Contractor	All relevant worksites	Implemented
		<u>Debris and Litter</u>			
		In order to maintain water quality in acceptable conditions with regard to aesthetic quality, contractors should be required, under conditions of contract, to ensure that site management is optimised and that disposal of any solid materials, litter or wastes to marine waters does not occur. Debris and refuse generated on-site should be collected, handled and disposed of	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		properly to avoid entering into the adjacent harbour waters. Stockpiles of cement and other construction materials should be kept covered when not being used.			
		<u>Accidental Spillage</u>			
		Oils and fuels should only be used and stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to the nearby harbour waters, all fuel tanks and storage areas should be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank, to prevent spilled fuel oils from reaching the coastal waters of the Victoria Harbour WCZ. The bund should be drained of rainwater after a rain event.	Contractor	All relevant worksites	Implemented
<u>Waste Management Measures</u>					
		<u>Waste Management Plan</u>			
AEIAR-174/2013 S11.4.8.1	AEIAR-174/2013 EM&A Manual S9.2.1.2	Contractor should be requested to submit an outline Waste Management Plan (WMP) prior to the commencement of construction work, in accordance with the ETWB TC(W) No.19/2005 so as to provide an overall framework of waste management and reduction.	Contractor	All relevant worksites	Implemented
		<u>Good Site Practices</u>			
AEIAR-130/2009 S3.5, S5.5	AEIAR 130/2009 EM&A Manual S2.5, S4.5	Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site.	Contractor	All relevant worksites	Implemented
		Training of site personnel in proper waste management and chemical waste handling procedures.	Contractor	All relevant worksites	Implemented
		Provision of sufficient waste disposal points and regular collection for disposal.	Contractor	All relevant worksites	Partially Implemented
		Appropriate measures to minimize windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites).	Contractor	All relevant worksites	Implemented
		<u>Waste Reduction Measures</u>			
		Sort C&D waste from demolition of the remaining structures to recover recyclable portions such as metals.	Contractor	All relevant worksites	Not Applicable
		Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.	Contractor	All relevant worksites	Implemented
		Encourage collection of aluminum cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force.	Contractor	All relevant worksites	Implemented
		Any unused chemicals or those with remaining functional capacity should be recycled.	Contractor	All relevant worksites	Implemented
		Proper storage and site practices to minimize the potential for damage or contamination of construction materials.	Contractor	All relevant worksites	Implemented
		<u>Construction and Demolition Materials</u>			
		Where it is unavoidable to have transient stockpiles of C&D material within the work site pending collection for disposal, the transient stockpiles shall be located away from waterfront or storm drains as far as possible.	Contractor	All relevant worksites	Implemented
		Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric.	Contractor	All relevant worksites	Partially Implemented
		Skip hoist for material transport should be totally enclosed by impervious sheeting.	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase
					Implementation Status
		Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving a construction site.	Contractor	All relevant worksites	Implemented
		The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores.	Contractor	All relevant worksites	Implemented
		The load of dusty materials carried by vehicle leaving a construction site should be covered entirely by clean impervious sheeting to ensure dust materials do not leak from the vehicle.	Contractor	All relevant worksites	Implemented
		All dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet.	Contractor	All relevant worksites	Implemented
		The height from which excavated materials are dropped should be controlled to a minimum practical height to limit fugitive dust generation from unloading.	Contractor	All relevant worksites	Implemented
		When delivering inert C&D material to public fill reception facilities, the material should consist entirely of inert construction waste and of size less than 250mm or other sizes as agreed with the Secretary of the Public Fill Committee. In order to monitor the disposal of the surplus C&D material at the designed public fill reception facility and to control fly tipping, a trip-ticket system as stipulated in the ETWB TCW No. 31/2004 "Trip Ticket System for Disposal of Construction and Demolition Materials" should be included as one of the contractual requirements and implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. An Independent Environmental Checker should be responsible for auditing the results of the system.	Contractor	All relevant worksites	Implemented
		<u>Chemical Waste</u>			
		After use, chemical wastes (for example, cleaning fluids, solvents, lubrication oil and fuel) should be handled according to the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Spent chemicals should be collected by a licensed collector for disposal at the CWTF or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.	Contractor	All relevant worksites	Partially Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		<u>General Refuse</u>			
		General refuse should be stored in enclosed bins or compaction units separate from C&D material. A licensed waste collector should be employed by the contractor to remove general refuse from the site, separately from C&D material. Effective collection and storage methods (including enclosed and covered area) of site wastes would be required to prevent waste materials from being blown around by wind, wastewater discharge by flushing or leaching into the marine environment, or creating odour nuisance or pest and vermin problem.	Contractor	All relevant worksites	Implemented
<u>Land Contamination Measures</u>					
		<u>For any excavation works conducted at Radar Station</u>			
AEIAR-130/2009 S3.6.57	AEIAR 130/2009 EM&A Manual S4.6	As the risk due to dermal contact with groundwater by site workers is uncertain, it is recommended that personnel protective equipment (PPE) be used by site workers as a mitigation measure.	Contractor	All relevant worksites	Not Applicable
<u>Landscape and Visual Impact</u>					
New Distributor Roads Serving the Planned KTD					
		<u>Construction Phase</u>			
AEIAR-130/2009 S3.8.12	AEIAR 130/2009 EM&A Manual S2.8	All existing trees should be carefully protected during construction.	Contractor	All relevant worksites	Not Applicable
		Trees unavoidably affected by the works should be transplanted where practical. Detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWBC 2/2004 and 3/2006. Final locations of transplanted trees should be agreed prior to commencement of the work.	Contractor	All relevant worksites	Not Applicable
		Control of night-time lighting.	Contractor	All relevant worksites	Not Applicable

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

# MaterialLab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		Erection of decorative screen hoarding.	Contractor	All relevant worksites	Implemented
Trunk Road T2					
		<u>Construction Phase</u>			
AEIAR-174/2013 S9.9.1.1	AEIAR-174/2013 EM&A Manual S7.2.1.2	All works shall be carefully designed to minimize impacts on existing landscape resources and visually sensitive receivers. Existing trees within works area shall be retained and protected.	Contractor	All relevant worksites	Not Applicable
		Existing trees of good quality and condition that are unavoidably affected by the works should be transplanted.	Contractor	All relevant worksites	Not Applicable
		Large temporary stockpiles of excavated material shall be covered with unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance.	Contractor	All relevant worksites	Partially Implemented
		Construction plant and building material shall be orderly and carefully stored in order to create a neat and tidy visual appearance.	Contractor	All relevant worksites	Implemented
		Erection of decorative screen hoarding should be designed to be compatible with the existing urban context.	Contractor	All relevant worksites	Implemented
		All lighting in construction site shall be carefully controlled to minimize light pollution and night-time glare to nearby residences and GIC user. The contractor shall consider other security measures, which shall minimize the visual impacts.	Contractor	All relevant worksites	Not Applicable
<u>General Condition</u>					
		The Permit Holder shall display conspicuously a copy of this Permit on the Project site(s) at all vehicular site entrances/exits or at a convenient location for public's information at all times. The Permit Holder shall ensure that the most updated information about the Permit, including any amended Permit, is displayed at such locations. If the Permit Holder surrenders a part or the whole of the Permit, the notice he sends to the Director shall also be displayed at the same	Contractor	All relevant worksites	Implemented

The copyright of this document is owned by MaterialLab Consultants Ltd. It may not be reproduced except with prior written approval from the Company.

A Fugro Group Company

## MATERIALAB CONSULTANTS LIMITED

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

# Materialab

EIA Ref	EM&A Ref	Environmental Protection Measures / Mitigation Measures	Who to implement the measure	Location / Timing	Construction Phase Implementation Status
		locations as the original Permit. The suspended, varied or cancelled Permit shall be removed from display at the Project site(s).			

Implementation status: Implemented / Partially Implemented / Not Implemented / Not Applicable

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

---

**MaterialLab**

### **Appendix K**

#### **Weather and Meteorological Conditions during Reporting Month**

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
 Profit Industrial Building,  
 1-15 Kwai Fung Crescent, Kwai Fong,  
 Hong Kong..

Tel : (852)-24508238  
 Fax : (852)-24508032  
 Email : mcl@fugro.com.hk



Date	Mean Pressure (hPa)	Air Temperature			Mean Relative Humidity (%)	Total Rainfall (mm)
		Maximum (deg. C)	Mean (deg. C)	Minimum (deg. C)		
September 2016						
01	1003.3	30.0	27.9	25.2	88	68.9
02	1002.0	31.0	28.7	27.5	86	6.1
03	1002.7	31.2	28.1	25.7	87	7.0
04	1005.2	30.1	28.2	27.0	84	Trace
05	1006.1	29.2	27.1	25.8	89	75.3
06	1006.7	27.7	26.7	25.7	90	10.8
07	1007.5	28.0	26.5	25.4	90	20.4
08	1008.0	28.4	27.1	25.5	90	2.8
09	1008.4	29.4	27.0	25.5	88	16.3
10	1007.8	27.7	26.3	24.5	93	53.2
11	1008.4	31.6	28.1	25.9	87	6.6
12	1010.2	32.7	28.7	26.0	83	0.0
13	1010.2	30.9	28.2	26.0	84	8.5
14	1004.5	32.6	29.6	26.9	69	0.0
15	1002.9	31.9	29.4	28.0	68	0.7
16	1004.9	31.3	29.0	27.3	70	0.0
17	1005.7	31.6	29.3	27.3	66	0.0
18	1006.9	31.5	28.6	26.3	66	Trace
19	1008.0	32.6	28.6	25.5	73	3.8
20	1012.1	29.5	25.5	22.8	87	39.6
21	1014.4	30.6	27.1	24.7	77	2.4
22	1013.6	28.9	27.2	26.1	76	0.0
23	1012.0	29.9	27.7	26.5	78	Trace
24	1010.5	30.5	27.9	26.6	78	Trace
25	1009.8	30.5	28.1	26.9	80	0.0
26	1007.7	31.1	28.5	27.0	81	Trace
27	1002.6	34.9	31.1	27.7	68	0.0
28	999.5	32.2	30.4	28.9	58	0.0
29	1003.9	28.9	26.5	24.9	70	0.7
30	1007.7	26.4	25.1	24.1	78	0.0

Source: Hong Kong Observatory – Hong Kong Observatory

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars, one above and one below the text.

### **Appendix L**

#### **Cumulative statistics on Environmental Complaints, Notifications of Summons and Successful Prosecution**

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
 Profit Industrial Building,  
 1-15 Kwai Fung Crescent, Kwai Fong,  
 Hong Kong..

Tel : (852)-24508238  
 Fax : (852)-24508032  
 Email : mcl@fugro.com.hk


**Environmental Complaints Log**

Complaint Log No.	Date of Receipt	Received From and Received By	Nature of Complaint	Date Investigated	Outcome	Date of Reply
Nil	-	-	-	-	-	-

**Cumulative Statistics on Complaints**

Environmental Parameters	Cumulative No. Brought Forward	No. of Complaints This Month	Cumulative Project-to-Date
Air	0	0	0
Noise	0	0	0
Water	0	0	0
Waste	0	0	0
Total	0	0	0

**Cumulative Statistics on Notification of Summons and Successful Prosecutions**

Environmental Parameters	Cumulative No. Brought Forward	No. of Notification of Summons and Prosecutions This Month	Cumulative Project-to-Date
Air	0	0	0
Noise	0	0	0
Water	0	0	0
Waste	0	0	0
Total	0	0	0

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,

Profit Industrial Building,

1-15 Kwai Fung Crescent, Kwai Fong,

Hong Kong..

Tel : (852)-24508238

Fax : (852)-24508032

Email : mcl@fugro.com.hk

The logo for MaterialLab, featuring the word "MaterialLab" in a bold, black, sans-serif font. The text is centered between two thick, horizontal black bars, one above and one below the text.

### **Appendix M**

#### **Summary of Site Audit in the Reporting Month**

**Summary of Site Audit in the Reporting Month**

Parameters	Date	Observations and Recommendations	Follow-up
Air Quality	1 September 2016	Open stockpile shall be covered with impermeable sheeting to prevent dust emission. (Portion Q)	The item was rectified by the Contractor and inspected on 8 September 2016.
	14 September 2016	Open stockpile shall be covered with impermeable sheeting to prevent dust emission. (Portion I)	The item was rectified by the Contractor and inspected on 21 September 2016.
	21 September 2016	Open stockpile shall be covered with impermeable sheeting to prevent dust emission. (Portion F)	The item was rectified by the Contractor and inspected on 29 September 2016.
	29 September 2016	Open stockpile shall be covered with impermeable sheeting to prevent dust emission. (Portion I and X)	The item was rectified by the Contractor and inspected on 6 October 2016.
Noise	NA		
Water Quality	8 September 2016	Muddy surface runoff shall be avoided entering the discharge channel directly. (Portion F)	The item was rectified by the Contractor and inspected on 14 September 2016.
	8 September 2016	More sand bags shall be provided to direct surface runoff flowing into the mud pit. (Portion F)	The item was rectified by the Contractor and inspected on 14 September 2016.
	21 September 2016	Sediment accumulated in U-channel shall be cleaned up regularly. (Portion F)	The item was rectified by the Contractor and inspected on 29 September 2016.
Chemical and Waste Management	8 September 2016	Spillage of oil was found on the ground. The spilled oil shall be removed properly. (Portion N)	The item was rectified by the Contractor and inspected on 14 September 2016.
	21 September 2016	Oil container shall be stored and labeled properly. (Portion F)	The item was rectified by the Contractor and inspected on 29 September 2016.
	29 September 2016	General refuse stored in the skip shall be collected regularly. (Portion B)	The item was rectified by the Contractor and inspected on 6 October 2016.
Land Contamination	NA		

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
 Profit Industrial Building,  
 1-15 Kwai Fung Crescent, Kwai Fong,  
 Hong Kong..

Tel : (852)-24508238  
 Fax : (852)-24508032  
 Email : mcl@fugro.com.hk



Parameters	Date	Observations and Recommendations	Follow-up
Landscape and Visual Impact	1 September 2016	Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. (Portion Q)	The item was rectified by the Contractor and inspected on 8 September 2016.
	14 September 2016	Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. (Portion I)	The item was rectified by the Contractor and inspected on 21 September 2016.
	21 September 2016	Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. (Portion F)	The item was rectified by the Contractor and inspected on 29 September 2016.
	29 September 2016	Open stockpiles shall be covered by unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. (Portion I and X)	The item was rectified by the Contractor and inspected on 6 October 2016.
General Condition	NA		

## **MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

---

**MaterialLab**

### **Appendix N**

#### **Outstanding Issues and Deficiencies**

**MATERIALAB CONSULTANTS LIMITED**

Room 723 & 725, 7/F, Block B,  
Profit Industrial Building,  
1-15 Kwai Fung Crescent, Kwai Fong,  
Hong Kong..

Tel : (852)-24508238  
Fax : (852)-24508032  
Email : mcl@fugro.com.hk

**MaterialLab****Summary of Outstanding Issues and Deficiencies in the Reporting Month**

Parameters	Outstanding Issues	Deficiencies
Air Quality	NA	Any items of deficiencies can be referred to <b>Appendix M.</b>
Noise	NA	
Water Quality	NA	
Chemical and Waste Management	NA	
Land Contamination	NA	
Landscape and Visual Impact	NA	
General Condition	NA	
Others	NA	